

VF-3W Series

3W Regulated Single output



Features


- 12 Pin SIL Package
- 1000 VDC Isolation
- Up to 5200 VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 74%
- -25 ~ 71°C Operation Temperature Range



The VF series is a family of cost effective 3W single output DC-DC converters. These converters combine miniature package in a 12-pin SIL compatible case with high performance features such as 1000 VDC~5200 VDC input/output isolation voltage, continuous short circuit protection with automatic restart and hight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5, 12, 24 with output voltage of 3.3, 5, 7.2, 9, 12, 15, 18, 24 Vdc. High performance features include high efficiency operation up to 74% and output voltage accuracy of ±2% maximum. Standard features include an input range of ±10% tolerance and low output noise and ripple.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage accuracy	±2%	Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Line regulation	±0.5%	Pin Material	0.5mm Alloy42 Solder-coated
Load regulation	(From 0% to 100% Load) ±0.5% (Output 3.3V Model) ±1.5%	Potting Material	Epoxy (UL94V-0 rated)
Ripple & noise (20 MHz bandwidth)(1)	75mVpk-pk	Weight	7.0g
Short Circuit Protection	Indefinite(Automatic Recovery)	Dimensions	1.26"x0.32"x0.57"
Temperature coefficient	±0.02%/°C	ENVIRONMENT SPECIFICATIONS	
Capacitor load(2)	See table	Operating Temperature	-25°C ~ +85°C(See Derating Curve) -25°C ~ +71°C(For 100% load)
INPUT SPECIFICATIONS		Maximum Case Temperature	100°C
Voltage Range	±10%	Storage Temperature	-40°C~125°C
Max. Input Current	See table	Cooling	Nature Convection
No-Load Input Current	See table	ABSOLUTE MAXIMUM RATINGS(4)	
Input Filter	Capacitor	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Reflected Ripple Current(3)	20mApk-pk	Input Surge Voltage(100mS)	
		5 Models	7 Vdc ,max.
		12 Models	15 Vdc ,max.
		24 Models	28 Vdc ,max.
		Soldering Temperature (1.5mm from case 10sec max.)	260°C ,max.
GENERAL SPECIFICATIONS		EMC SPECIFICATIONS	
Efficiency	See table	Radiated Emissions	EN55032 CLASS B
I/O Isolation Voltage(60sec)		Conducted Emissions (6)	EN55032 CLASS B
Input/Output	1000~5200Vdc	ESD	IEC 61000-4-2 Perf. Criteria A
I/O Isolation Capacitance	60 pF Typ.	RS	IEC 61000-4-3 Perf. Criteria A
I/O Isolation Resistance	1000M Ohm	EFT (7)	IEC 61000-4-4 Perf. Criteria A
Switching Frequency	50kHz typ	Surge (7)	IEC 61000-4-5 Perf. Criteria A
Humidity	95% rel H	CS	IEC 61000-4-6 Perf. Criteria A
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.12 Mhrs	PFMF	IEC 61000-4-8 Perf. Criteria A
Safety Standard : (designed to meet)	IEC 60950-1		

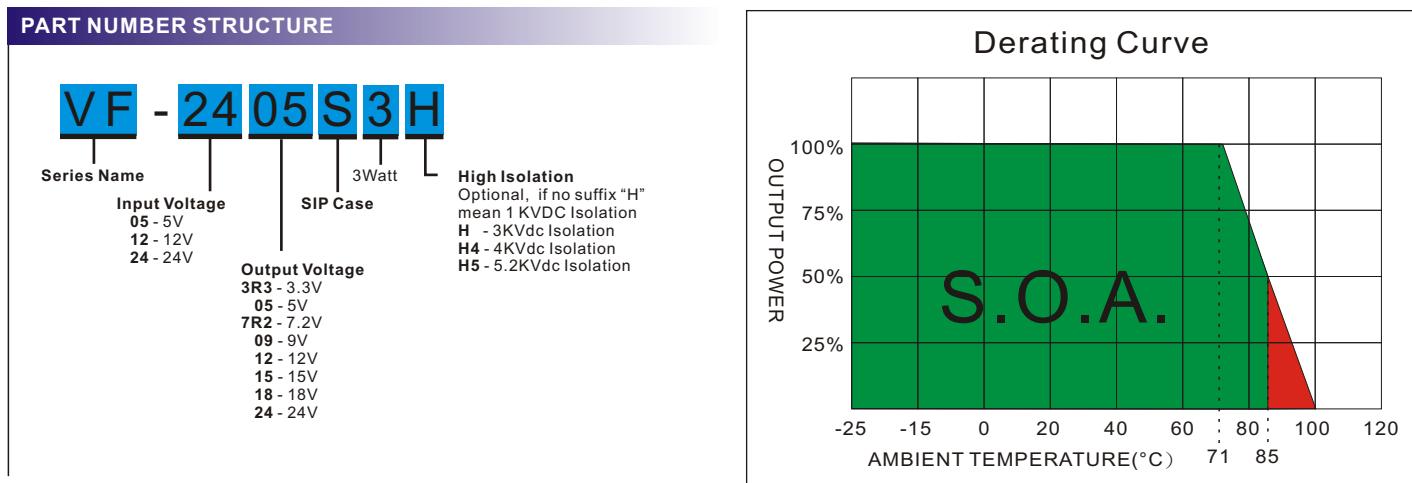

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current	EFFICIENCY @FL (% ,typ.)	Capacitor Load @LF (μF ,max.)
		No-Load (mA ,max.)	Full Load (mA ,typ.)		Full load (mA)		
VF-053R3S3	5	80	720	3.3	600	55	470
VF-0505S3	5	55	923	5	600	65	470
VF-057R2S3	5	90	896	7.2	416	67	470
VF-0509S3	5	70	857	9	333	70	470
VF-0512S3	5	70	882	12	250	68	470
VF-0515S3	5	90	870	15	200	69	470
VF-0518S3	5	100	896	18	166	67	470
VF-0524S3	5	100	870	24	125	69	470
VF-123R3S3	12	25	280	3.3	600	59	470
VF-1205S3	12	50	391	5	600	64	470
VF-127R2S3	12	35	352	7.2	416	71	470
VF-1209S3	12	35	352	9	333	71	470
VF-1212S3	12	40	342	12	250	73	470
VF-1215S3	12	50	352	15	200	71	470
VF-1218S3	12	30	357	18	166	70	470
VF-1224S3	12	30	342	24	125	73	470
VF-243R3S3	24	20	142	3.3	600	58	470
VF-2405S3	24	20	195	5	600	64	470
VF-247R2S3	24	20	187	7.2	416	67	470
VF-2409S3	24	20	174	9	333	72	470
VF-2412S3	24	20	169	12	250	74	470
VF-2415S3	24	21	176	15	200	71	470
VF-2418S3	24	30	174	18	166	72	470
VF-2424S3	24	20	169	24	125	74	470

Suffix "H" means 3 KVdc isolation


Suffix "H4" means 4 KVdc isolation

Suffix "H5" means 5.2 KVdc isolation

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor Lin(12 μ H) and a source capacitor Cin(47 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

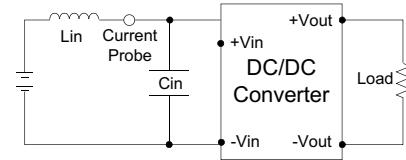


Output Ripple & Noise Measurement Test

The Scope measurement bandwidth is 20MHz .



EMI Filter


Input filter components (C1, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

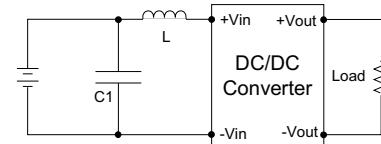

	C1	L
VF-05XXXXXX	220 μ F/100V	12 μ H
VF-12XXXXXX	220 μ F/100V	12 μ H
VF-24XXXXXX	220 μ F/100V	12 μ H

EFT/Surge Filter

Input filter components (C1,D1) are used to help meet IEC 61000-4-4 and IEC 61000-4-5 .

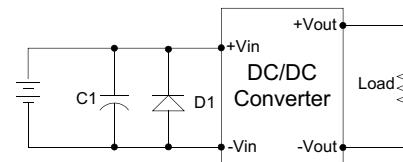


	C1	D1
VF-05XXXXXXXX		SMAJ9A
VF-12XXXXXXXX	1000 μ F,50V	SMAJ14A
VF-24XXXXXXXX		SMAJ26A


NOTE

- 1.Ripple/Noise measured with 20MHz bandwidth.
- 2.Tested by minimal Vin and constant resistive load.
- 3.Measured Input reflected ripple current with a simulated source inductance of 12 μ H.
- 4.Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
- 5.Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
- 6.Input filter components are required to help meet conducted emission class B, which application refer to the EMI Filter of design & feature configuration.
- 7.An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5
The VF-Series recommended an aluminum electrolytic capacitor and TVS to connect in parallel.
Which application refer to the EFT/Surge Filter of design & feature configuration.


VF - 3W Regulated Single output

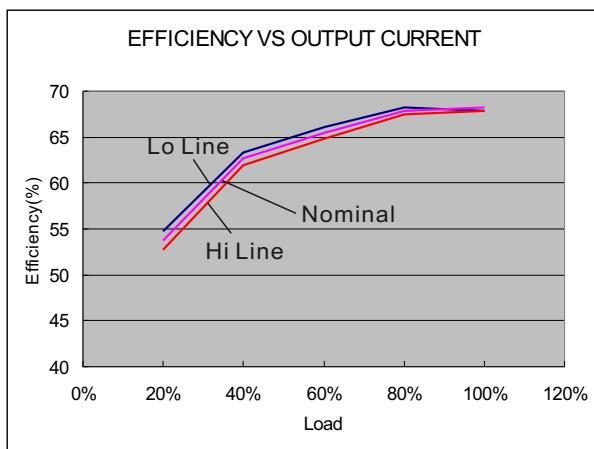

05 Models

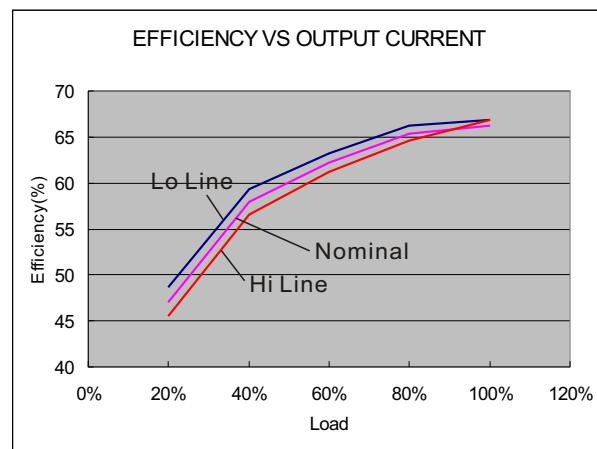


12 Models

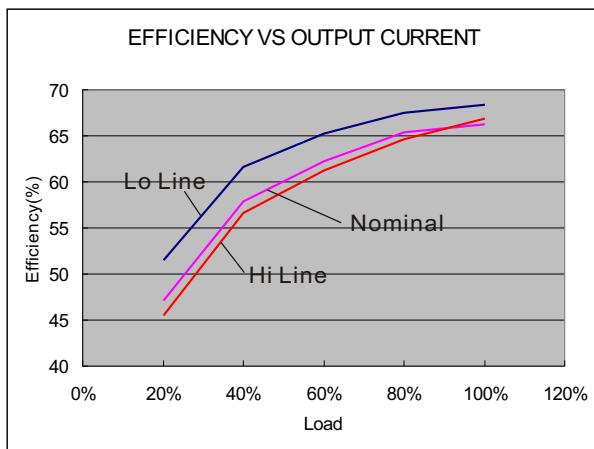

24 Models

MECHANICAL SPECIFICATIONS

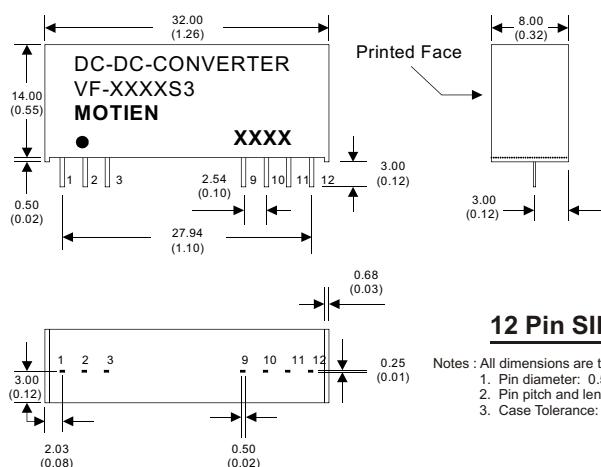

12 Pin SIL Package

PIN CONNECTIONS		
PIN NUMBER	SINGLE	SINGLE-H
1	+V Input	+V Input
2	N.C.	-V Input
3	N.C.	N.C.
9	N.C.	N.C.
10	-V Output	-V Output
11	+V Output	+V Output
12	-V Input	N.C.