


NA3W-3W Series



3W 4:1 Regulated Single & Dual output

Features

- Highest Power Density In 8 Pin DIL PackageWide
- 4:1 Input RangeSmallest Footprint 3W Converter
- Full SMD Technology
- 1600 VDC Isolation
- Continuous Short Circuit Protection
- Under Voltage Lock-Out Circuit
- Remote on/off Control
- Efficiency up to 84%
- -40 ~ 80°C Operation Temperature Range



The NA3W series is a family of cost effective and high performed 3W single & dual output DC-DC converters. These converters are built in non-conductive black plastic package in a 8-pin DIL miniature compact case with high performance features wide range devices operate over 4:1 input voltage range providing stable output voltage. Devices are encapsulated using flame retardant resin. Input voltages of 12, 24, 48 Vdc with output voltage of 3.3, 5, 12, 15, ± 5 , ± 12 , ± 15 Vdc. High performance features include high efficiency operation up to 84% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage Accuracy	$\pm 1\%$	Case Material	Non conductive black plastic(UL94V-0 rated)
Maximum Output Current	See table	Base Material	Non conductive black plastic(UL94V-0 rated)
Line Regulation	$\pm 0.2\%$, max.	Potting Material	Silicon (UL94V-0 rated)
Load Regulation	(From 0% to 100% Load) $\pm 1.0\%$, max.	Pin Material	C5191R-H Solder-coated
Cross Regulation (Dual Output) (1)	$\pm 5\%$	Weight	3.6g
Ripple & Noise (20 MHz bandwidth)(2)	Single 150mVpp, max. Dual 100mVpp, max.	Dimensions	0.55"x0.55"x0.32"
Short Circuit Protection	Indefinite (Automatic Recovery)	ENVIRONMENT SPECIFICATIONS	
Temperature Coefficient	$\pm 0.02\%/^\circ\text{C}$	Operating Temperature	-40°C~80°C (See Derating Curve)
Capacitive Load(3)	See table	Maximum Case Temperature	100°C
Transient Recovery Time (4)	500us, typ.	Storage Temperature	-55°C~125°C
Transient Response Deviation(4)	$\pm 3\%$, max. Single Output 3.3V, 5V: $\pm 5\%$, max.	Cooling(6)	Nature Convection
INPUT SPECIFICATIONS		ABSOLUTE MAXIMUM RATINGS(7)	
Voltage Range	See table	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Start up Time(Nominal V_{in} and constant resistive load)	30mS, typ.	Input Surge Voltage(100ms max)	
Input Current	See table	12 Models	25Vdc, max.
No-Load Input Current	See table	24 Models	50Vdc, max.
Input Filter	Capacitor	48 Models	100Vdc, max.
Input Reflected Ripple Current(5)	20mA pk-pk	Soldering Temperature	260°C max.
Remote on/off		(1.5mm from case 10 sec. max.)	
ON:	open or high impedance	EMC CHARACTERISTICS	
OFF:	2-4mA input current (via 1K)	Radiated Emissions	EN55032 CLASS A
Off stand by input current(Nominal V_{in})	2.5mA, max.	Conducted Emissions(8)	EN55032 CLASS A
Under Voltage Lockout		ESD	IEC61000-4-2 Perf. Criteria A
12V Modes Module ON / OFF	4.2Vdc / 3.5Vdc, typ.	RS	IEC61000-4-3 Perf. Criteria A
24V Modes Module ON / OFF	8.5Vdc / 7.0Vdc, typ.	EFT(9)	IEC61000-4-4 Perf. Criteria A
48V Modes Module ON / OFF	17.5Vdc / 15.5Vdc, typ.	Surge(9)	IEC61000-4-5 Perf. Criteria A
		CS	IEC61000-4-6 Perf. Criteria A
		PFMF	IEC61000-4-8 Perf. Criteria A
GENERAL SPECIFICATIONS			
Efficiency	See table, typ.		
I/O Isolation Voltage (60 sec)	1600Vdc		
I/O Isolation Capacity	2000 pF, typ.		
I/O Isolation Resistance	1000M Ohm, min.		
Switching Frequency	100kHz, min.		
Humidity	95%reIH		
Reliability Calculated MTBF (MIL-HDBK-217 F)	>820Khrs@25°C		
Safety Standard(designed to meet)	IEC/UL/EN 60950-1 IEC/UL/EN 62368-1		

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

PART NUMBER STRUCTURE

NA3W - 2405 S

Series Name

Input Voltage Range


12 - 4.5 ~ 18V
24 - 9 ~ 36V
48 - 18 ~ 75V

Case Type

S - Single Output
D - Dual Output

Nominal Output Voltage

3R3 - 3.3V
5 - 5V
12 - 12V
15 - 15V

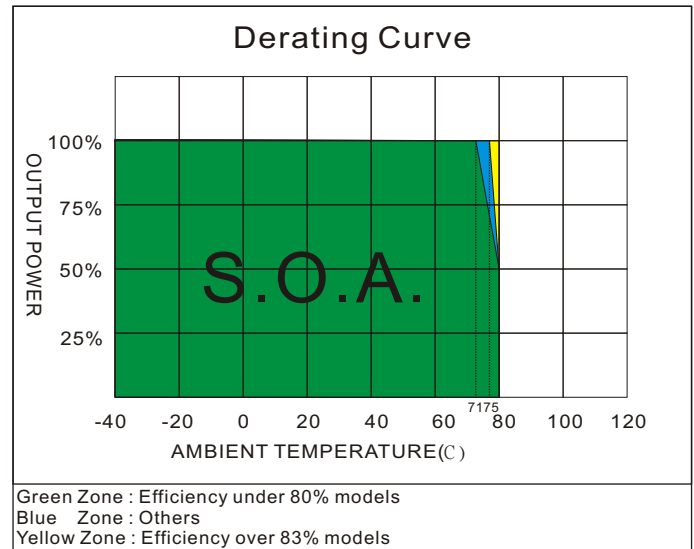

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (%.typ)	Capacitor Load @FL (uF,max)
		No-Load (mA,max)	Full Load (mA,typ.)		Min. load (mA)	Full load (mA)		
NA3W-123R3S	12 (4.5-18)	30	257	3.3	0	700	75	3300
NA3W-1205S	12 (4.5-18)	45	309	5	0	600	81	1680
NA3W-1212S	12 (4.5-18)	55	301	12	0	250	83	470
NA3W-1215S	12 (4.5-18)	60	301	15	0	200	83	330
NA3W-1205D	12 (4.5-18)	30	313	±5	0	±300	80	±1000
NA3W-1212D	12 (4.5-18)	55	305	±12	0	±125	82	±220
NA3W-1215D	12 (4.5-18)	60	301	±15	0	±100	83	±220
NA3W-243R3S	24 (9-36)	25	127	3.3	0	700	76	3300
NA3W-2405S	24 (9-36)	20	152	5	0	600	82	1680
NA3W-2412S	24 (9-36)	30	149	12	0	250	84	470
NA3W-2415S	24 (9-36)	35	149	15	0	200	84	330
NA3W-2405D	24 (9-36)	25	154	±5	0	±300	81	±1000
NA3W-2412D	24 (9-36)	30	151	±12	0	±125	83	±220
NA3W-2415D	24 (9-36)	35	149	±15	0	±100	84	±220
NA3W-483R3S	48 (18-75)	10	65	3.3	0	700	74	3300
NA3W-4805S	48 (18-75)	10	77	5	0	600	81	1680
NA3W-4812S	48 (18-75)	15	77	12	0	250	81	470
NA3W-4815S	48 (18-75)	15	76	15	0	200	82	330
NA3W-4805D	48 (18-75)	20	79	±5	0	±300	79	±1000
NA3W-4812D	48 (18-75)	20	78	±12	0	±125	80	±220
NA3W-4815D	48 (18-75)	25	78	±15	0	±100	80	±220

NOTE



1. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
2. Ripple/Noise measured with a 10µF electrolytic capacitor and 0.1µF ceramic capacitor.
3. Test by minimal Vin and constant resistive load.
4. Test by normal Vin and 100%-25% load, 25% load step change.
5. Measured Input reflected ripple current with a simulated source inductance of 27µH and a source capacitor Cin(47µF, ESR<1.0Ω at 100KHz).
6. "Nature Convection" is usually about 30-65 LFM but is not equal to still air (0 LFM).
7. Exceeding the absolute ratings of the unit could cause damage. It's not allowed for continuous operating ratings.
8. Input filter components are required to help meet conducted emission class A, Which application refer to the EMI Filter(Conducted Emissions).
9. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5. The filter capacitor Motien suggest: Nippon - chemi - con KY series, 220µF/100V.

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : sales@motien.com.tw

TEST CONFIGURATIONS


Output Ripple & Noise Measurement Test

Use a 10 μ F electrolytic capacitor and 0.1 μ F ceramic capacitor.
The Scope measurement bandwidth is 20MHz.

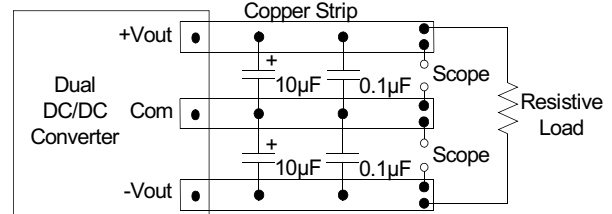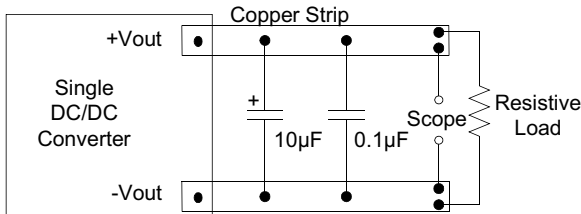


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (27 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

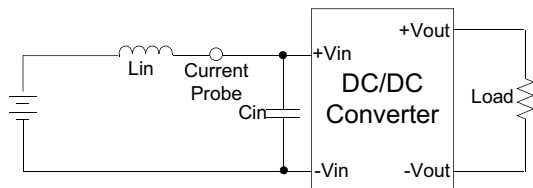

EFT/Surge Filter


Input filter components (C2) is used to help meet IEC61000-4-4 and IEC61000-4-5 .

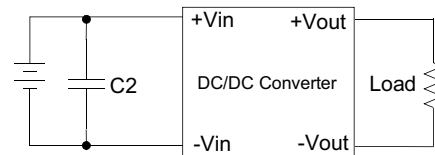

C2	
NA3W-XXXXXX	220 μ F, 100V

EMI Filter(Conducted Emissions)

Input filter components (C1,L1) are used to meet EMI test criterial A.
These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

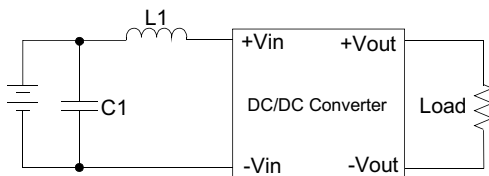


	C1	L1
NA3W-12XXXX	1210, 10 μ F, 35V	2.2 μ H
NA3W-24XXXX	1210, 2.2 μ F, 100V	
NA3W-48XXXX	1210, 4.7 μ F, 100V	




TEST CONFIGURATIONS

Remote ON / OFF Test Step

Input current(2~4mA) via 1KΩ to Pin2 , converter OFF.
open or high impedance , converter ON.

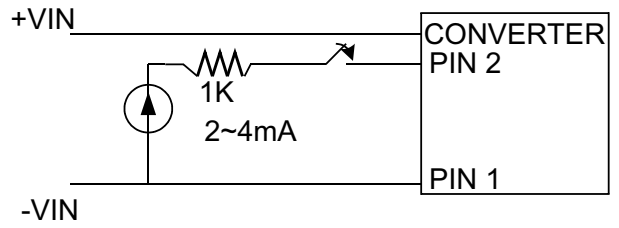

MECHANICAL SPECIFICATION



8 Pin DIL Package

- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5±0.05 (0.02±0.002)
 2. Pin pitch and length tolerance: ±0.35 (±0.014)
 3. Pin to case tolerance: ±0.5 (±0.02)
 4. Case Tolerance: ±0.5 (±0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	-V Input	-V Input
2	Remote On/Off	Remote On/Off
4	+V Input	+V Input
5	+V Output	+V Output
6	N.P.	Common
7	-V Output	-V Output