

R6-6W Series

6W 2:1 Regulated Single & Dual output



Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 81%
- -40 ~ 85°C Operating Temperature
- Plastic Case Standard, Optional Metal Case





The R6 series is a family of cost effective 6W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 12, 24 and 48 with output voltage of 5, 9, 12, 15, 24, ± 5 , ± 9 , ± 12 , ± 15 and ± 24 Vdc. High performance features include high efficiency operation up to 81% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$, max.	Case Material	Non-conductive Black Plastic (UL94V-0 rated)
Line regulation	$\pm 0.5\%$, max.		Nickel-coated Copper
Load regulation	$\pm 0.5\%$, max.	Base Material	Non-conductive Black Plastic (UL94V-0 rated)
Ripple & noise (20 MHz bandwidth)(1)	60mV pk-pk, max.	Pin Material	$\Phi 0.5$ mm Brass Solder-coated
Short circuit protection	Continuous	Potting Material	Epoxy (UL94V-0 rated)
Temperature coefficient	$\pm 0.02\%/^{\circ}\text{C}$	Weight	12.5g (Plastic Case) / 17.0g (Metal Case)
Capacitor load(2)	See table, max.	Dimensions	1.25"x0.8"x0.4"
INPUT SPECIFICATIONS		ABSOLUTE MAXIMUM RATINGS(4)	
Voltage Range	See table	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Current (No Load)	See table, max.	Input Surge Voltage (100mS)	
Input Current (Full Load)	See table, typ.	12 Models	24 Vdc, max.
Input Filter	PI Type	24 Models	40 Vdc, max.
Input Reflected Ripple Current(3)	35mA pk-pk, typ.	48 Models	80 Vdc, max.
GENERAL SPECIFICATIONS		Soldering Temperature	260°C max.
Efficiency	See table, typ.	(1.5mm from case 10sec max.)	
I/O Isolation Voltage(60sec)		EMC SPECIFICATIONS	
Input/Output	1500~3500Vdc	Radiated Emissions	EN55032 CLASS A
Metal Case/Input & Output	1000Vdc	Conducted Emissions (7)	EN55032 CLASS A
I/O Isolation Capacitance	60 pF Typ.	ESD	IEC 61000-4-2 Perf. Criteria A
I/O Isolation Resistance	1000M Ohm, min.	RS	IEC 61000-4-3 Perf. Criteria A
Switching Frequency	100~400kHz	EFT (8)	IEC 61000-4-4 Perf. Criteria A
Humidity	95% rel H	Surge (8)	IEC 61000-4-5 Perf. Criteria A
Reliability Calculated MTBF (MIL-HDBK-217 F)	>1Mhrs	CS	IEC 61000-4-6 Perf. Criteria A
Safety Standard : (designed to meet)	IEC 60950-1	PFMF	IEC 61000-4-8 Perf. Criteria A
ENVIRONMENT SPECIFICATIONS			
Operating Temperature	-40°C~85°C (See Derating Curve)		
	-40°C~71°C (For 100% load)		
Maximum Case Temperature	100°C		
Storage Temperature	-40°C~125°C		
Cooling	Nature Convection		

R6 - 6W 2:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

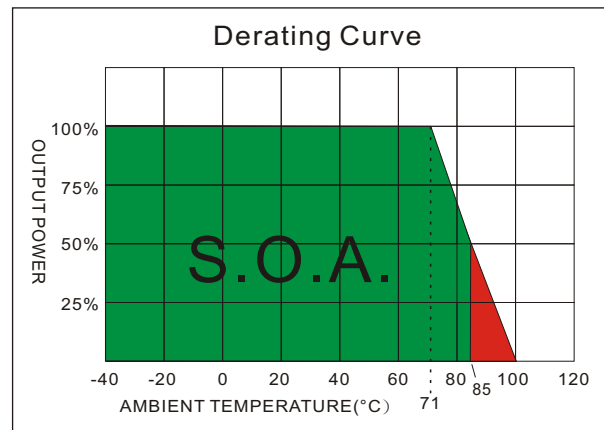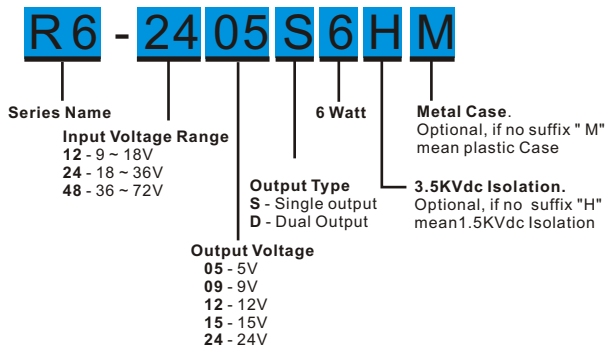

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @FL (μF , max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
R6-1205S6	9-18	20	735	5	300	1200	68	2200
R6-1209S6	9-18	20	694	9	167	666	72	470
R6-1212S6	9-18	20	676	12	125	500	74	470
R6-1215S6	9-18	20	633	15	100	400	79	470
R6-1224S6	9-18	20	658	24	63	250	76	220
R6-1205D6	9-18	20	649	±5	±150	±600	78	±1000
R6-1209D6	9-18	20	641	±9	±83	±333	78	±220
R6-1212D6	9-18	20	641	±12	±63	±250	78	±220
R6-1215D6	9-18	20	625	±15	±50	±200	80	±220
R6-1224D6	9-18	20	641	±24	±31	±125	78	±100
R6-2405S6	18-36	12	329	5	300	1200	76	2200
R6-2409S6	18-36	12	312	9	167	666	80	470
R6-2412S6	18-36	12	312	12	125	500	80	470
R6-2415S6	18-36	12	308	15	100	400	81	470
R6-2424S6	18-36	12	325	24	63	250	77	220
R6-2405D6	18-36	12	329	±5	±150	±600	76	±1000
R6-2409D6	18-36	12	325	±9	±83	±333	77	±220
R6-2412D6	18-36	12	312	±12	±63	±250	80	±220
R6-2415D6	18-36	12	312	±15	±50	±200	80	±220
R6-2424D6	18-36	12	321	±24	±31	±125	78	±100
R6-4805S6	36-72	8	169	5	300	1200	74	2200
R6-4809S6	36-72	8	162	9	167	666	77	470
R6-4812S6	36-72	8	162	12	125	500	77	470
R6-4815S6	36-72	8	158	15	100	400	79	470
R6-4824S6	36-72	8	167	24	63	250	75	220
R6-4805D6	36-72	8	169	±5	±150	±600	74	±1000
R6-4809D6	36-72	8	164	±9	±83	±333	76	±220
R6-4812D6	36-72	8	164	±12	±63	±250	76	±220
R6-4815D6	36-72	8	160	±15	±50	±200	78	±220
R6-4824D6	36-72	8	162	±24	±31	±125	77	±100


Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

TEST CONFIGURATIONS

EMI Filter

Input filter components (C1,C2, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.



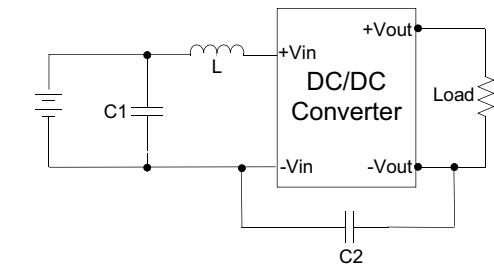


	C1	L	C2
R6-05XXXXX	220uF/100V	12uH	
R6-12XXXXX	220uF/100V	12uH	
R6-24XXXXX	220uF/100V	12uH	MLCC 470PF
R6-48XXXXX	220uF/100V	12uH	MLCC 470PF

NOTE

1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12μH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.
7. Input filter components are be required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
8. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
The filter capacitor Motien suggest: Nippon - chemi - con KY series, 220μF/100V.

MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

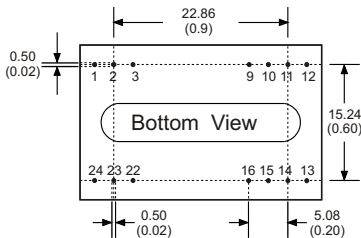


24 Pin DIL Package
Non-Conductive Plastic

- Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ±0.05 (0.02 ±0.002)
 2. Pin pitch and length tolerance: ±0.35 (±0.014)
 3. Case Tolerance: ±0.5 (±0.02)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.P.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.

MECHANICAL SPECIFICATIONS

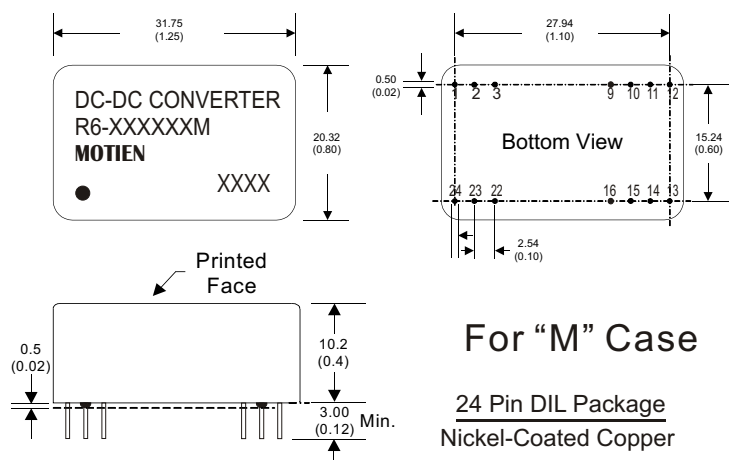

Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)
 4. Stand-off tolerance: ± 0.1 (± 0.004)

PIN CONNECTIONS				
PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.P.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.