


SVR-1.0 Series

1A Output Current, Non-Isolated DC/DC converter

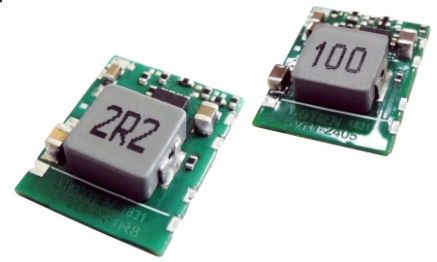

Features

- SMD-Package, Full SMD Technology
- Non-Isolated Regulator with Very Low Standby Current
- Adjustable Output Voltage
- Continuous Short Circuit Protection
- Remote ON/OFF Control
- Low Ripple and Noise
- Excellent Line / Load Regulation
- Efficiency Up to 96%

The SVR-1.0 series is a family of cost effective 1.2~15W single output buck DC-DC converters. These converters achieve low cost and small SMD package, output voltage adjustment, remote ON/OFF control, continuous short circuit protection with automatic restart, good line / load regulation and ultra low quiescence current. Input voltages of 3~5.5 and 4.6~36 with output voltage of 1.2, 1.5, 1.8, 2.5, 3.3, 5, 6.5, 9, 12 and 15Vdc. High performance features include high efficiency operation up to 96%.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified.

OUTPUT SPECIFICATIONS		GENERAL SPECIFICATIONS	
Voltage Accuracy	±2%, max.	Efficiency	See table, typ.
Output voltage adjustability (Trim)(1)	±10%, max.	Switching Frequency	05 series:1.2MHz, typ. 24 series:410KHz, typ.
Output Current (Full Load)	1000mA, max.	Humidity	95% rel H
Line regulation	Output<3.0Vdc:±0.5%, max. Output>3.0Vdc:±0.3%, max.	Reliability Calculated MTBF(MIL-HDBK-217 F)	05 series:>35Mhrs 24 series:>4.7Mhrs
Load regulation	(From 10% to 100% Load) ±0.6%, max.	Safety Standard (design to meet)	UL/cUL 60950-1, 62368-1 IEC/EN 60950-1, 62368-1
Ripple & Noise (2)	Output<7.5Vdc:50mVpk-pk, max. Output>7.5Vdc:75mVpk-pk, max.	ENVIRONMENT SPECIFICATIONS	
Short Circuit Protection	Continuous (Automatic Recovery)	Operating Temperature	-40°C ~ +105°C(See Derating Curve) -40°C ~ +65°C(For 100% Load)
Temperature coefficient	±0.02%/°C	Storage Temperature	-55°C ~ +125°C
Capacitor Load(3)	330 µF, max.	Over Temperature Protection (Internal IC junction)	+150°C, typ.
Transient Recovery Time(4)	250µs, typ.	Cooling(8)	Nature Convection
Transient Response Deviation(4)	Output<4Vdc : ±5%, max. Output>4Vdc : ±3%, max.	Lead-free Reflow Solder Process	IPC/JEDEC J-STD-020D.1
INPUT SPECIFICATIONS		Reflow Temperature	Peak 245°C(10 sec),max.
Input Voltage Range	See table	Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1 Level 1
Start up Time	5mS, typ.	Vibration	MIL-STD-810F
(Nominal Vin and constant resistive load)		PHYSICAL SPECIFICATIONS	
Input Current (No-Load)	See table, typ.	Weight	1.4g
Input Current (Full-Load)	See table, typ.	Dimensions	0.60"x0.47"x0.15"
Input Filter	Capacitors	EMC CHARACTERISTICS	
Input Reflected Ripple Current(5)	35mApk-pk, typ.	Radiated Emissions(9)	EN55032 CLASS B
Remote ON/OFF (CTRL)(6)		Conducted Emissions(9)	EN55032 CLASS B
ON:	2~5Vdc or open circuit	ESD	IEC61000-4-2 Perf. Criteria A
OFF:	0~0.4Vdc or short circuit pin10 and -Vin	RS	IEC61000-4-3 Perf. Criteria A
OFF Idle current:	05 series:0.3mA, max. 24 series:0.8mA, max.	EFT(10)	IEC61000-4-4 Perf. Criteria A
ABSOLUTE MAXIMUM RATINGS(7)		Surge(10)	IEC61000-4-5 Perf. Criteria A
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.		CS	IEC61000-4-6 Perf. Criteria A
Input Surge Voltage (100mS)	05 series:6Vdc, max. 24 series:40Vdc, max.	PFMF	IEC61000-4-8 Perf. Criteria A

NOTE

1. The 1.2Vdc output model only support Vadj up, do not support Vadj down.
2. Ripple/Noise measured with 20MHz bandwidth.
3. Tested by minimal Vin and constant resistive load.
4. Tested by normal Vin and 50% load step change (50%-100% of Io).
5. Input reflected ripple current is measured through a source inductor L1(12µH) and a source capacitor C1=10µF at nominal input and full load.
6. The remote on/off control pin is referenced to -Vin.
7. Do not operate the unit(s) exceeding the absolute maximum rating, over rating causes damage to the units.
8. "Nature Convection" is usually about 30-65 LFM but is not equal to still air (0 LFM).
9. The SVR-1.0 series can meet EN55032 Class B with an external filter in parallel with the input pins.
10. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

PART NUMBER STRUCTURE

SVR 1 - 24 05 R


Series Name

Output Current
1.0 - 1AInput Voltage Range
05 - 3~5.5V
24 - 4.6~36V

Output Voltage
1R2 - 1.2V
1R5 - 1.5V
1R8 - 1.8V
2R5 - 2.5V
3R3 - 3.3V
05 - 5V
6R5 - 6.5V
09 - 9V
12 - 12V
15 - 15V

Packing Options
"blank" - standard Tube packing
R - for tape & reel packing

Derating Curve

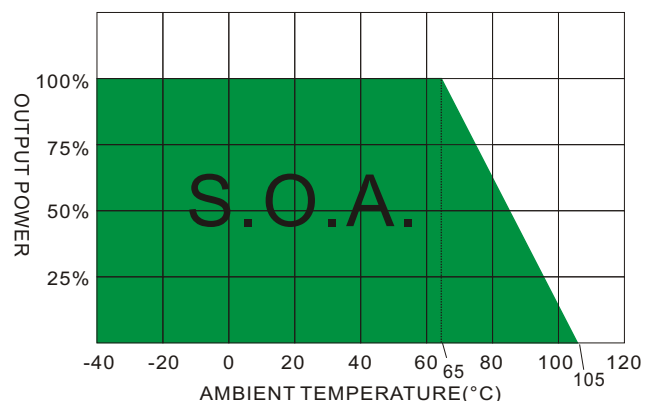


MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current (mA)			OUTPUT		EFFICIENCY		Capacitor Load (μF)
		No-Load	Full-Load Vin (Min)	Full-Load Vin (Max)	Voltage (Vdc)	Current (mA)	Vin (Min) @FL (%)	Vin (Max) @FL (%)	
SVR1-051R2	5 (3-5.5)	0.4	442	242	1.2	1000	90.5	90.5	330
SVR1-051R5	5 (3-5.5)	0.4	544	297	1.5	1000	92	92	330
SVR1-051R8	5 (3-5.5)	0.4	649	354	1.8	1000	92.5	92.5	330
SVR1-052R5	5 (3.8-5.5)	0.4	697	484	2.5	1000	94.5	94	330
SVR1-241R2	24 (4.6-36)	1.5	300	47	1.2	1000	87	72	330
SVR1-241R5	24 (4.6-36)	1.5	367	55	1.5	1000	89	76	330
SVR1-241R8	24 (4.6-36)	1.5	433	64	1.8	1000	90.5	79	330
SVR1-242R5	24 (4.6-36)	1.5	588	84	2.5	1000	92.5	83	330
SVR1-243R3	24 (4.75-36)	1.5	740	106	3.3	1000	94	86.5	330
SVR1-2405	24 (6.5-36)	1.5	806	156	5	1000	95.5	89.5	330
SVR1-246R5	24 (9-36)	1.5	765	201	6.5	1000	94.5	90	330
SVR1-2409	24 (12-36)	1.5	786	272	9	1000	95.5	92	330
SVR1-2412	24 (15-36)	1.5	843	359	12	1000	95	93	330
SVR1-2415	24 (18-36)	1.5	869	444	15	1000	96	94	330

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12μH) and a source capacitor C_{in} (10μF, ESR<1.0Ω at 100kHz) at nominal input and full load.

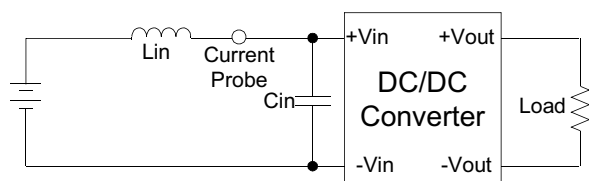

Output Ripple & Noise Measurement Test


Use a 10μF electrolytic capacitor and 0.1μF ceramic capacitor. The Scope measurement bandwidth is 0-20MHz.

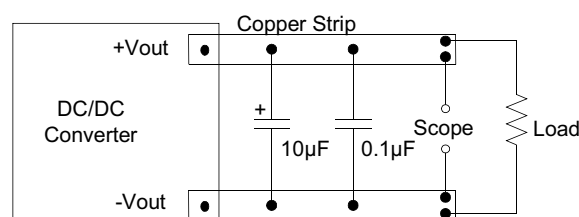

DESIGN CONFIGURATIONS

Standard Application Circuit


1. C_{in} is required and must be connected close to the pin terminal of the module. ($C_{in}=10\mu F$)
2. $C_{out}=47\mu F$ (Optional)

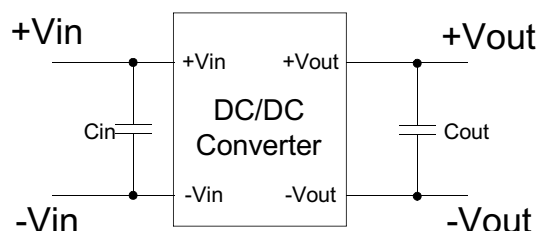

Remote ON / OFF Test Step


Input voltage (2~5Vdc) connect to Pin10 or open, converter ON.

Input voltage (0~0.4Vdc) connect to Pin10 or short, converter OFF.

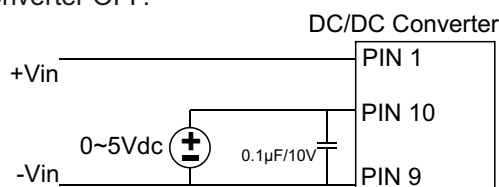


Output Voltage Adjustment

Pin 6 via a resistor to Pin 5 (+Vout), V_o trim down.
Pin 6 via a resistor to Pin 7 (-Vout), V_o trim up.



Trim down




Trim up

EMC COUNTERMEASURES

EMI Countermeasures

Input filter components (C_{in} , $C1$, $L1$) are used to help meet EMI requirement for the module.


These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

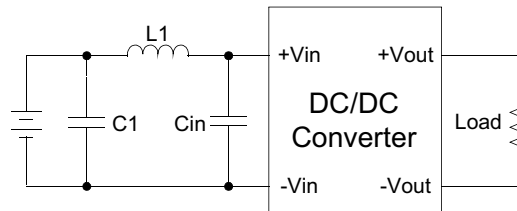

	C1	L1	Cin
SVR1-05XX	1206, 10μF, 50V	6.8μH	1206, 10μF, 50V
SVR1-24XX	1206, 4.7μF, 50V	33μH	1206, 10μF, 50V




EFT & Surge Test Countermeasures

The filter MOTIEN suggest : 05Vin models : Nippon - chemi - con KY series , 2200uF/50V and a TVS , 3KW , 6.0V
24Vin models : Nippon - chemi - con KY series , 330uF/100V and a TVS , 3KW , 36V

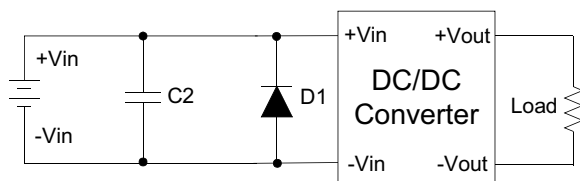

	C2	D1
SVR1-05XX	2200uF, 50V	SMDJ 6.0A
SVR1-24XX	330uF, 100V	SMDJ 36A

MECHANICAL SPECIFICATIONS

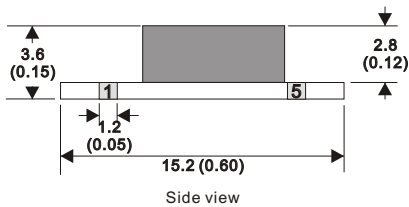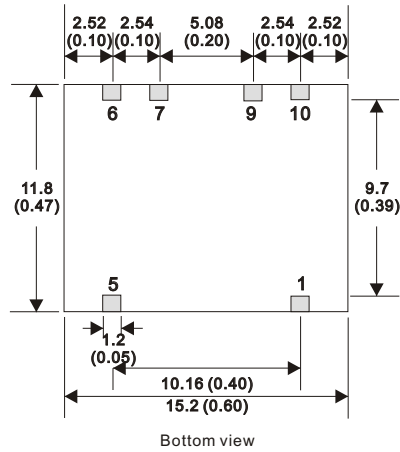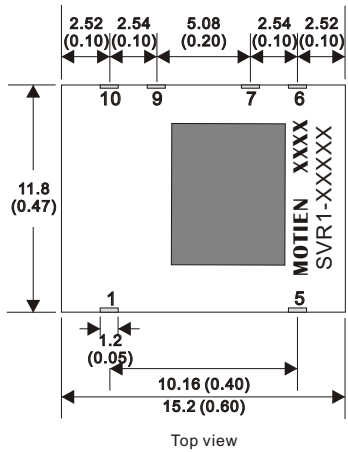

SMD 10Pin Package

Notes : All dimensions are typical in millimeters (inches).



1. Pin pitch tolerances: ± 0.25 (± 0.01)
2. Pin profile tolerance: ± 0.1 (± 0.004)
3. Other tolerances: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	SINGLE
1	+V Input
5	+V Output
6	Trim
7	-V Output
9	-V Input
10	Remote ON/OFF

Tube dimension

Standard packing - Tube
■ 1 Tube contains 40 converters

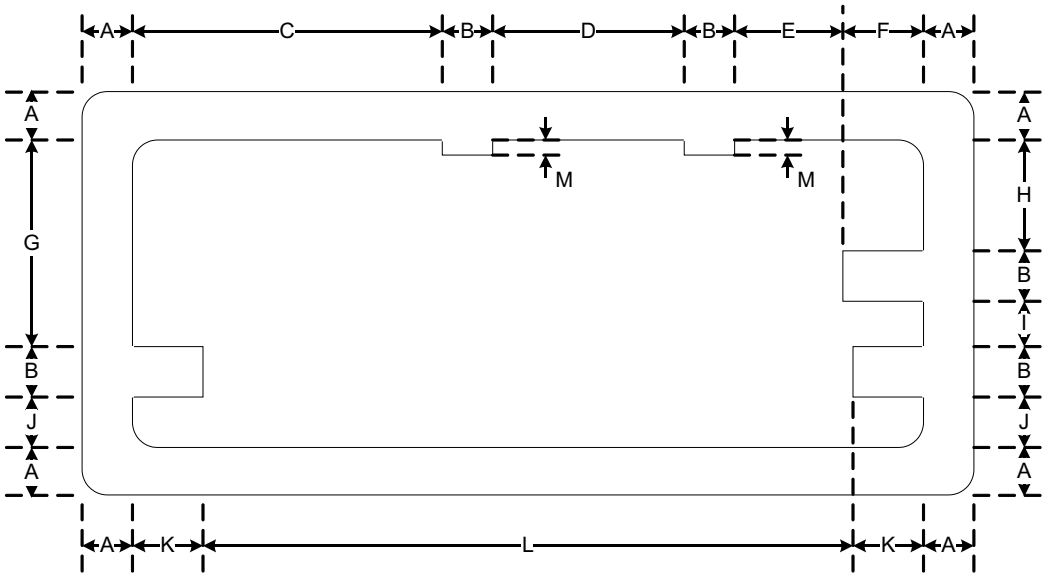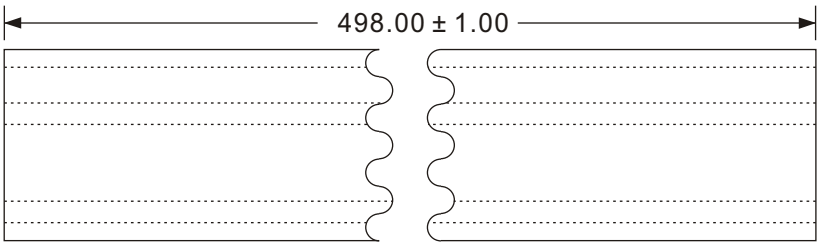

dimensions in [mm]


Tube Length : 498 ± 1.0 mm														
ITEM	A		B		C		D		E		F		G	
DIM	1.0	+0.2 -0.2	1.0	+0.2 -0.2	5.9	+0.2 -0.2	3.8	+0.2 -0.2	2.4	+0.2 -0.2	1.6	+0.10 -0.2	4.15	+0.2 -0.1
ITEM	H		I		J		K		L		M			
DIM	2.15	+0.2 -0.1	1.0	+0.2 -0.1	1.0	+0.2 -0.2	1.4	+0.2 -0.2	12.9	+0.2 -0.2	0.3	+0.1 -0.1		

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Tape & Reel dimension

Optional packing - Tape & Reel

- Specifications shall conform with current EIA-481 standard
- 1 Reel contains 500 converters
- Use appendix <<-R>> on order code

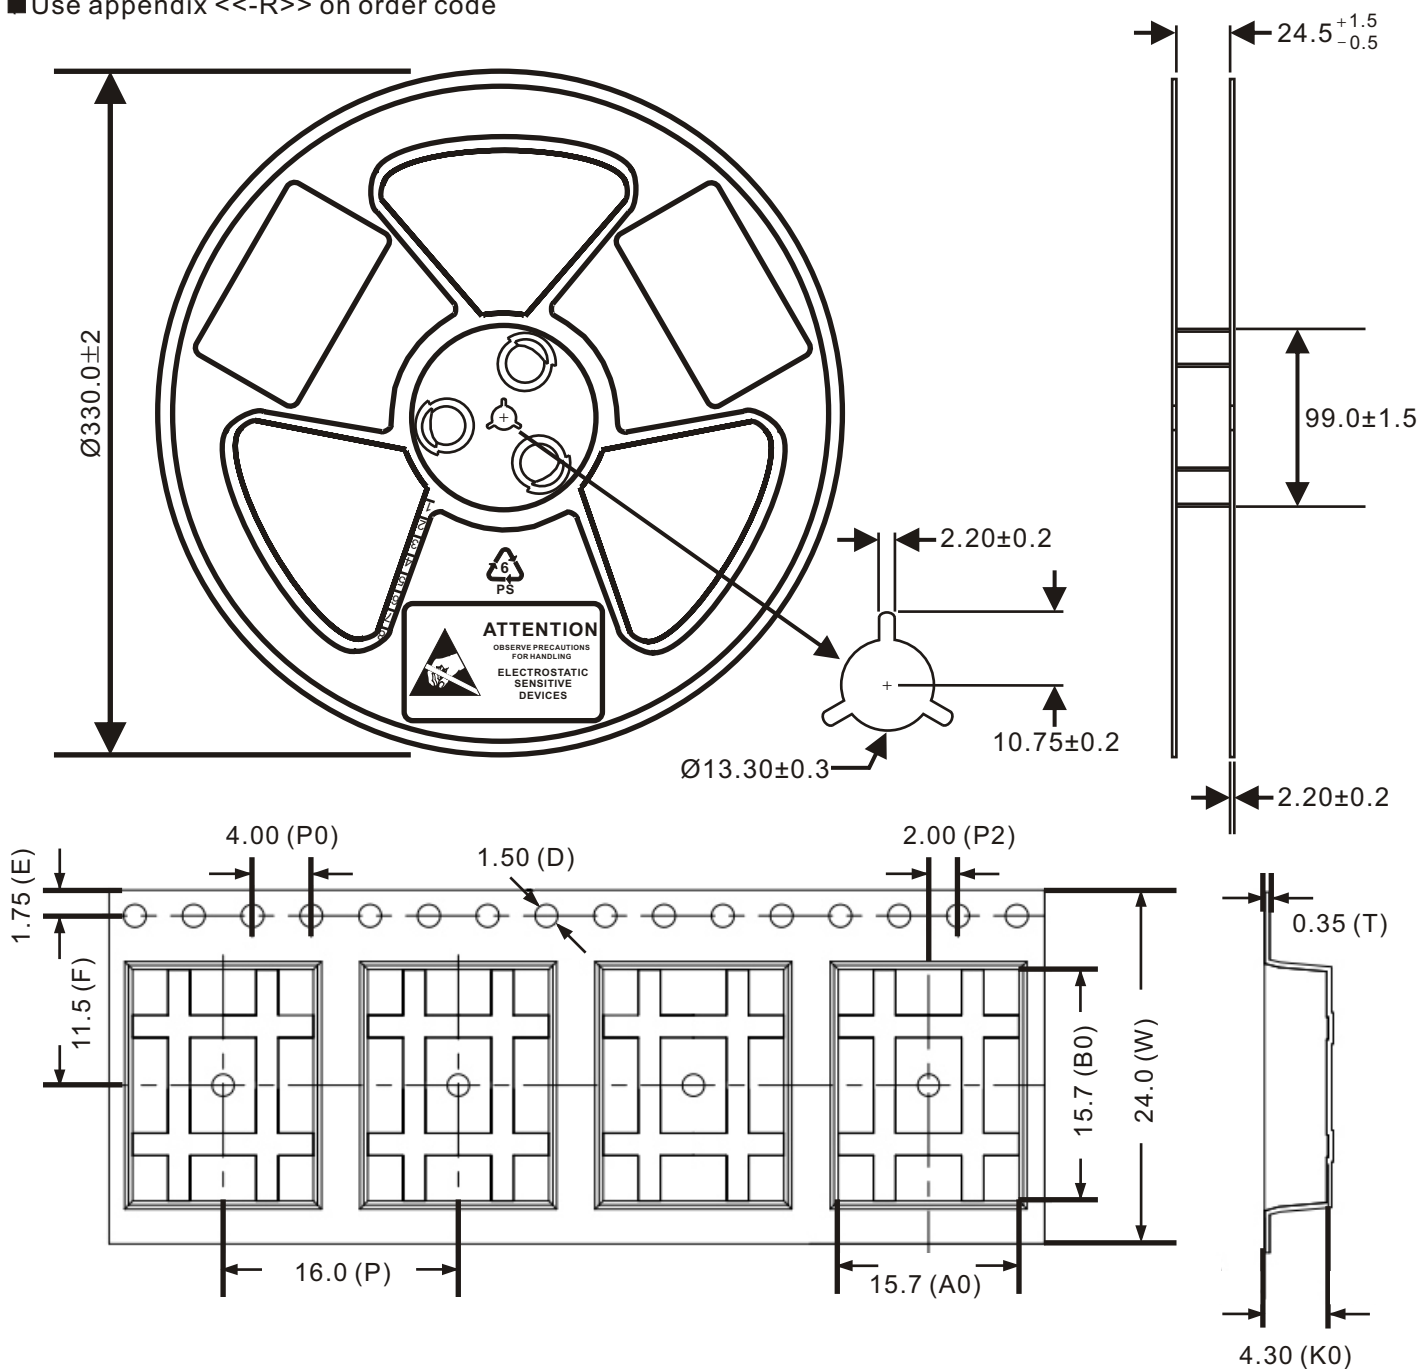

dimensions in [mm]

NOTE:

1. Material: Black Polystyrene.
2. Camber not to exceed 1mm in 100mm.
3. 10 sprocket hole pitch cumulative tolerance ± 0.2
4. A0 and B0 measured on a plane 0.3mm above the bottom of the pocket.
5. K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
6. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.

Carrier Length: 30M / 22" reel,Q'ty= 500 pcs/13"reel																						
ITEM	W		A0		B0		K0		T	P	F	E	D	P0	P2							
DIM	24.0	+0.30 -0.30	12.3	+0.20 -0.10	15.7	+0.20 -0.10	4.30	+0.20 -0.10	0.35	+0.05 -0.05	16.0	+0.10 -0.10	11.5	+0.15 -0.15	1.75	+0.10 -0.10	1.50	+0.10 -0.00	4.00	+0.10 -0.10	2.00	+0.10 -0.10

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, **MOTIEN Technologies** accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.