

# VBW-3W Series

3W 4:1 Regulated Single & Dual output



## Features

- 9 Pin SIL
- Wide 4:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 85%
- -40°C ~ 75°C Operation Temperature Range
- Remote on/off Control





The VBW series is a family of cost effective 3W single & dual output DC-DC converters. These converters combine non-conductive black plastic package in a 9-pin SIL compatible case with high performance features such as 1500 VDC input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Wide range devices operate over 4:1 input voltage range providing stable output voltage. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5, 12, 15,  $\pm 5$ ,  $\pm 12$ ,  $\pm 15$  Vdc. High performance features include high efficiency operation up to 85% and output voltage accuracy of  $\pm 1\%$  maximum.

All specifications typical at  $T_a = 25^\circ\text{C}$ , nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage Accuracy	$\pm 1\%$ , max.	Case Material	Non conductive black plastic
Output Current	See table, max.	Potting Material	Epoxy (UL94V-0 rated)
Line Regulation	$\pm 0.5\%$ , max.	Pin Material	C5191R-H Solder-coated
Load Regulation (1)	(From 10% to 100% Loading) $\pm 0.5\%$ , max.	Weight	6.5g, typ.
	(From 0% to 100% Loading) $V_{out}=12\text{V}$ and $15\text{V} \pm 0.5\%$ , max.	Dimensions	1.02"x0.36"x0.49"
	$V_{out}=3.3\text{V}$ and $5\text{V} \pm 1.0\%$ , max.		
Cross Regulation (Dual Output) (2)	$\pm 5\%$	GENERAL SPECIFICATIONS	
Ripple & Noise (20 Mhz bandwidth)(3)	50mVpk-pk, max.	Efficiency	See table, typ.
Short Circuit Protection	Indefinite(hiccup) (Automatic Recovery)	I/O Isolation Voltage (60sec)	1500Vdc
Temperature Coefficient	$\pm 0.02\%/^\circ\text{C}$	I/O Isolation Capacity	500 pF, max.
Capacitive Load(4)	See table, max.	I/O Isolation Resistance	1000M Ohm, min.
Transient Recovery Time (5)	300 $\mu\text{s}$ , typ.	Switching Frequency	250kHz, typ.
Transient Response Deviation(5)	$\pm 3\%$ , max.	Humidity	95%relH
		Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.212Mhrs@ 25°C
INPUT SPECIFICATIONS		Safety Standard	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1
Voltage Range	See table	Safety Approvals	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1
Start up Time(Nominal Vin and constant resistive load)	10mS, typ.	ENVIRONMENT SPECIFICATIONS	
Input Current (No Load)	See table, max.	Operating Temperature	-40°C ~ +85°C(See Derating Curve)
Input Current (Full Load)	See table, typ.		-40°C ~ +75°C(For 100% load)
Input Filter	Capacitor	Maximum Case Temperature	100°C
Input Reflected Ripple Current(6)	20mA pk-pk, typ.	Storage Temperature	-40°C~125°C
Remote on/off		Cooling	Nature Convection
ON:	0 ~ 0.6Vdc or open circuit		
OFF:	2.7~15.0Vdc		
Off stand by input current(Nominal Vin)	5mA max.		
ABSOLUTE MAXIMUM RATINGS(7)		EMC CHARACTERISTICS	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.		Conducted Emissions (8)	EN55032 CLASS A
Input Surge Voltage(100ms max)		Radiated Emissions	EN55032 CLASS A
24 Models	50Vdc, max.	ESD	IEC 61000-4-2 Perf. Criteria A
48 Models	100Vdc, max.	RS	IEC 61000-4-3 Perf. Criteria A
Soldering Temperature	260°C, max.	EFT(9)	IEC 61000-4-4 Perf. Criteria A
(1.5mm from case 10sec max.)		Surge(9)	IEC 61000-4-5 Perf. Criteria B
		CS	IEC 61000-4-6 Perf. Criteria A
		PFMF	IEC 61000-4-8 Perf. Criteria A

## PART NUMBER STRUCTURE

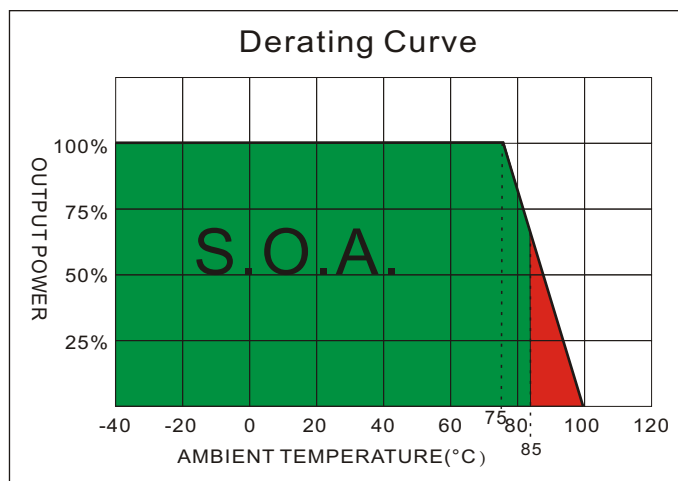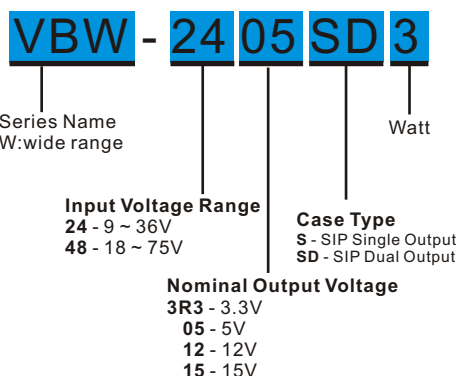

## MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @ FL (μF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VBW-243R3S3	9-36	10	125	3.3	0	700	77	2200uF
VBW-2405S3	9-36	10	153	5	0	600	82	1000uF
VBW-2412S3	9-36	10	149	12	0	250	84	165uF
VBW-2415S3	9-36	10	148	15	0	200	85	100uF
VBW-483R3S3	18-75	5	65	3.3	0	700	75	2200uF
VBW-4805S3	18-75	5	78	5	0	600	81	1000uF
VBW-4812S3	18-75	5	75	12	0	250	84	165uF
VBW-4815S3	18-75	5	75	15	0	200	84	100uF
VBW-2405SD3	9-36	10	155	±5	0	±300	81	±470uF
VBW-2412SD3	9-36	10	149	±12	0	±125	84	±100uF
VBW-2415SD3	9-36	10	149	±15	0	±100	84	±47uF
VBW-4805SD3	18-75	5	78	±5	0	±300	81	±470uF
VBW-4812SD3	18-75	5	75	±12	0	±125	84	±100uF
VBW-4815SD3	18-75	5	76	±15	0	±100	83	±47uF


## NOTE

- Operation at no load condition will not damage the product ; however, it will not meet all specifications.
- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Operation at lower load and no load may have bigger ripple and noise.
- Test by minimal Vin and constant resistive load.
- Test by normal Vin and 100%-25% load, 25% load step change; If the output voltage is 3.3V then the Transient Response Deviation is ±5%.
- Measured Input reflected ripple current with a simulated source inductance of 12μH and a source capacitor Cin(47μF, ESR<1.0Ω at 100KHz).
- Exceeding the absolute ratings of the unit could cause damage. It's not allowed for continuous operating ratings.
- Input filter components are required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
- An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.  
The filter capacitor Motien suggest: Nippon - chemi - con KY series, 220μF/100V.

## TEST CONFIGURATIONS


## Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor  $L_{in}$  (12 $\mu$ H) and a source capacitor  $C_{in}$  (47 $\mu$ F, ESR<1.0 $\Omega$  at 100KHz) at nominal input and full load.

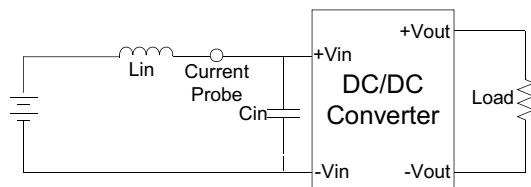

## EMI Filter


Input filter components ( $C_1$ ,  $L$ ) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

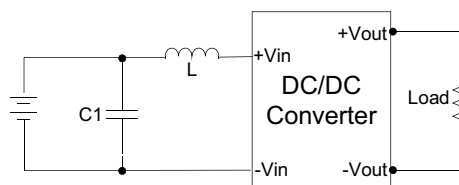


	C1	L
VBW-24XXXXXX	1210,225K/100V,X7R * 2PCS	6.8uH
VBW-48XXXXXX	1210,105K/100V,X7R	56uH

## CTRL Module ON / OFF

ON: 0~0.6Vdc or open circuit  
OFF: 2.7Vdc~15.0Vdc

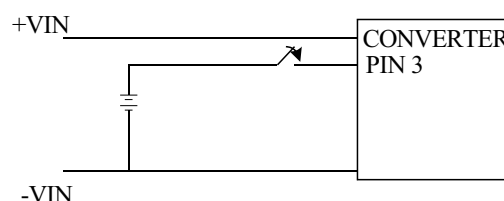


EFFICIENCY VS OUTPUT CURRENT

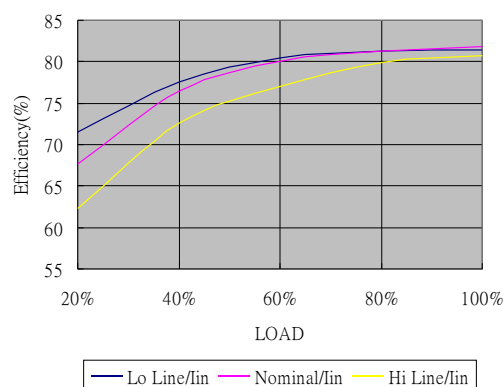




24 Models

EFFICIENCY VS OUTPUT CURRENT

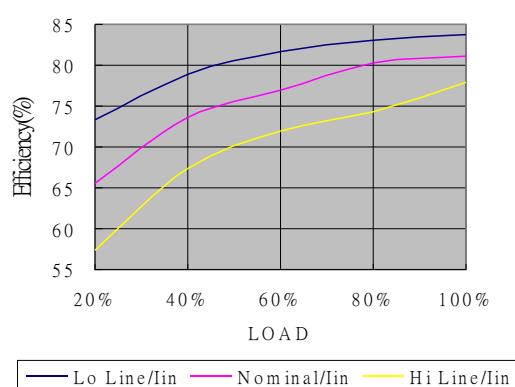

48 Models

## MECHANICAL SPECIFICATIONS



### 9 Pin SIL Package Non-Conductive Plastic

All dimensions are typical in millimeters ( inches ).  
 1. Pin diameter:  $1.0 \pm 0.05$  (  $0.04 \pm 0.002$  )  
 2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )  
 3. Case Tolerance:  $\pm 0.5$  (  $\pm 0.02$  )

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	-V Input	-V Input
2	+V Input	+V Input
3	Remote On/Off	Remote On/Off
6	+V Output	+V Output
7	N.C	Common
8	N.C.	N.C.
9	-V Output	-V Output