

VL-Series

1W Unregulated Single & Dual output

Features

- 7 Pin SIL Package
- 6000 VDC High Isolation
- Physical Clearance of Isolation Barrier 2.5mm
- Low Ripple and Noise
- Efficiency up to 81%
- Long Term Short Circuit Protection
- -40 ~ 85°C Operation Temperature Range
- 100% safety production test
- Rated working voltage for 250Vrms and 400Vdc
- Low coupling capacity
- Dedicated for IGBT applications



The VL series is a family of cost effective 1W single & dual output DC-DC converters. These converters achieve low cost and miniature SIP size without compromising performance. The bigger case ensures the physical clearance of isolation barrier of 2.5mm, which increases the reliability under hipot from 6KVDC. Devices are encapsulated with flame retardant resin. Input voltages are 5V,9V,12V,15V,24Vdc. with output voltage of 3.3V,5V,9V,12V,15V, $\pm 3.3V$, $\pm 5V$, $\pm 9V$, $\pm 12V$, ± 15 and $\pm 15/-9Vdc$. Special featuring long term output short circuit protection. Standard features include an input range of $\pm 10\%$ tolerance and low output noise and ripple.



All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Output Voltage Accuracy	$\pm 3\%$,max.	Clearance Distance	(Input to Output) 2.5 mm
Line Regulation	$\pm 1.2\%$ / Per 1% Vin Change ,max.	Case Material	Epoxy encapsulated(UL94V-0 rated)
Load Regulation	(From 10% to 100% Load) $\pm 10\%$,max.	Pin Material	0.5mm Alloy 42 Solder-coated
Ripple & Noise(1) (20 Mhz bandwidth)	200mVpk-pk ,max.	Potting Material	Epoxy (UL94V-0 rated)
Short Circuit Protection	Indefinite (Automatic Recovery)	Weight	4.3g
Temperature Coefficient	$\pm 0.03\%/^{\circ}C$	Dimensions	0.77"x0.39"x0.49"
Capacitor Load(2)	See Table ,max.		
INPUT SPECIFICATIONS		ABSOLUTE MAXIMUM RATINGS(4)	
Input Voltage Range	$\pm 10\%$,max.	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Current (Full-Load)	See Table ,typ.	Input Surge Voltage(100mS)	
Input Current (No-Load)	See Table ,max.	5 Models	7 Vdc ,max.
Input Filter	Capacitor	9 Models	12 Vdc ,max.
Input Reflected Ripple Current(3)	20mApk-pk ,typ.	12 Models	15 Vdc ,max.
		15 Models	18 Vdc ,max.
		24 Models	28 Vdc ,max.
GENERAL SPECIFICATIONS		Soldering Temperature	260°C ,max.
Efficiency	See table ,typ.	(1.5mm from case 10sec max.)	
I/O Isolation Voltage(60sec)	6000Vdc	EMC SPECIFICATIONS	
I/O Isolation Capacitance	10 pF ,typ.	Conducted Emissions(6)	EN55032 CLASS B
I/O Isolation Resistance	1000M Ω ,min.	Radiated Emissions	EN55032 CLASS B
Switching Frequency	20~50KHz ,typ.	ESD	IEC 61000-4-2 Perf. Criteria A
Humidity	95% rel H	RS	IEC 61000-4-3 Perf. Criteria A
Reliability Calculated MTBF(MIL-HDBK-217 F)	>2.39 Mhrs	EFT(7)	IEC 61000-4-4 Perf. Criteria A
Safety Standard : (designed to meet)	IEC 60950-1	CS	IEC 61000-4-6 Perf. Criteria A
		PFMF	IEC 61000-4-8 Perf. Criteria A
ENVIRONMENT SPECIFICATIONS			
Operating Temperature	-40°C~85°C		
Maximum Case Temperature	100°C		
Storage Temperature	-40°C~125°C		
Cooling	Nature Convection		

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

VL - 1W Unregulated Single & Dual output

PART NUMBER STRUCTURE

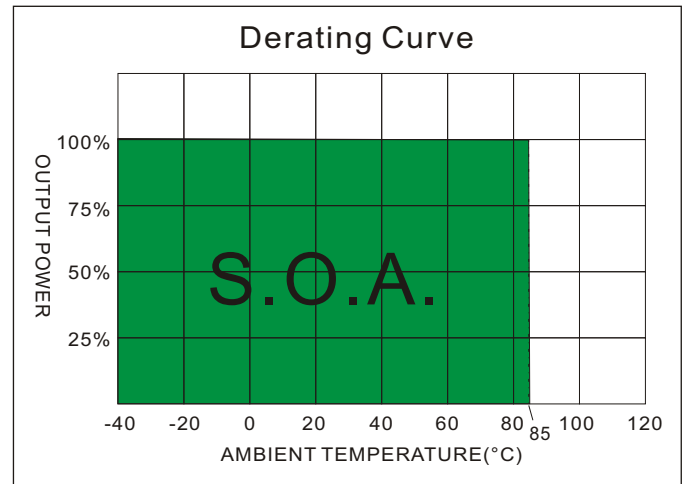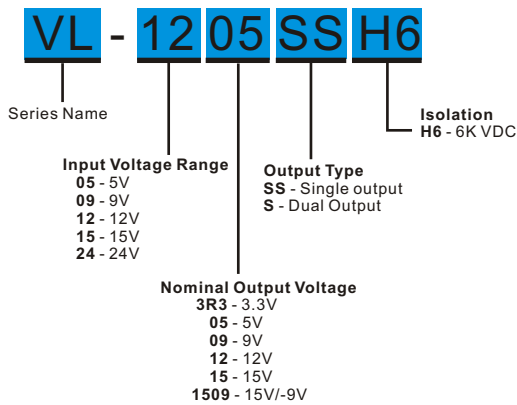

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	OUTPUT		EFFICIENCY @FL(% ,typ.)	Capacitor Load@LF (μF ,max.)
		Voltage(Vdc)	Current(mA)		
VL-XX3R3SSH6	5, 9, 12, 15, 24	3.3	303	69 - 75	220
VL-XX05SSH6	5, 9, 12, 15, 24	5	200	70 - 77	220
VL-XX09SSH6	5, 9, 12, 15, 24	9	111.1	70 - 80	220
VL-XX12SSH6	5, 9, 12, 15, 24	12	83.3	70 - 80	220
VL-XX15SSH6	5, 9, 12, 15, 24	15	66.7	70 - 80	220
VL-XX3R3SH6	5, 9, 12, 15, 24	±3.3	±151.5	68 - 75	±100
VL-XX05SH6	5, 9, 12, 15, 24	±5	±100	70 - 78	±100
VL-XX09SH6	5, 9, 12, 15, 24	±9	±55.6	70 - 81	±100
VL-XX12SH6	5, 9, 12, 15, 24	±12	±41.7	72 - 81	±100
VL-XX15SH6	5, 9, 12, 15, 24	±15	±33.3	70 - 81	±100
VL-XX1509SH6	5, 9, 12, 15, 24	+15 / -9	+33 / -55	74 - 84	±100

XX=Input Voltage


NOTE

1. Ripple/Noise measured with 20MHz bandwidth.
2. Tested by minimal V_{in} and constant resistive load.
3. Measured Input reflected ripple current with a simulated source inductance of 12μH and a source capacitor C_{in} (47μF, ESR<1.0Ω at 100KHz).
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. Input filter components are required to help meet conducted emission class B, which application refer to the EMI Filter of design & feature configuration.
7. An external filter capacitor is required if the module has to meet IEC61000-4-4.

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

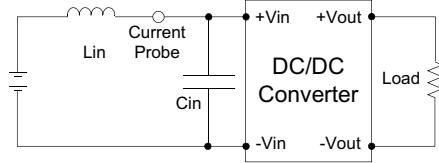


Output Ripple & Noise Measurement Test

The Scope measurement bandwidth is 20MHz .

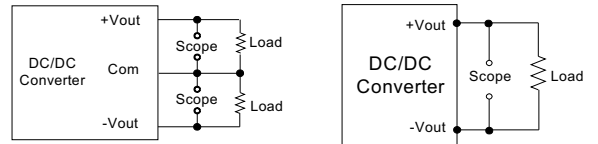


EMI Filter

Input filter components (C1, L, C2, C3) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

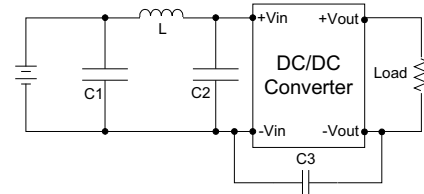

	C1	L	C2	C3
VL-05XXXXXX	1210, 2.2 μ F/100V	18 μ H		
VL-09XXXXXX	1210, 2.2 μ F/100V	18 μ H		
VL-12XXXXXX	1210, 2.2 μ F/100V	18 μ H		
VL-15XXXXXX	1210, 2.2 μ F/100V	18 μ H		
VL-24XXXXXX	1210, 2.2 μ F/100V	18 μ H	1210, 2.2 μ F/100V	1206, 470pF/2KV

MECHANICAL SPECIFICATIONS

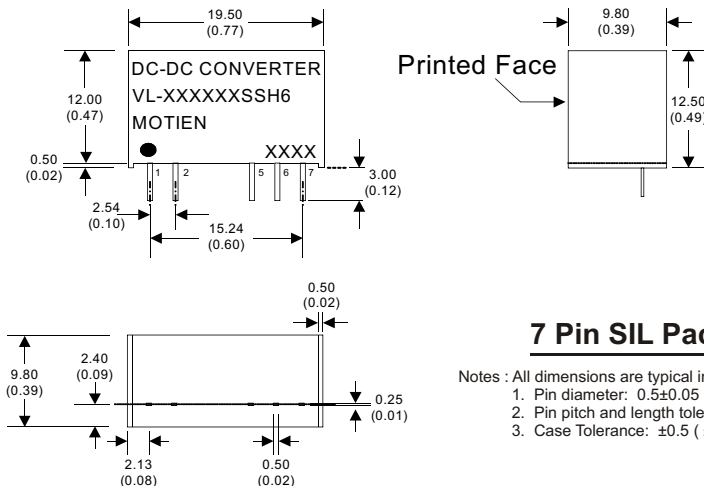

7 Pin SIL Package

- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 \pm 0.05 (0.02 \pm 0.002)
 2. Pin pitch and length tolerance: \pm 0.35 (\pm 0.014)
 3. Case Tolerance: \pm 0.5 (\pm 0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	+V Input	+V Input
2	-V Input	-V Input
5	-V Output	-V Output
6	N.P.	Common
7	+V Output	+V Output