


VNW-30W Series

30W 4:1 Regulated Single & Dual output



Features

- Ultra Wide 4:1 Input Range
- 1600 VDC Isolation
- No Minimum Load Required
- Efficiency up to 92%
- Extended Operating Temperature Range -40 ~ 100°C max.
- Adjustable Output Voltage
- Remote On/Off Control (CTRL)
- Continuous Short Circuit Protection
- Over Current Protection
- Over Voltage Protection
- Over Temperature Protection
- Soft Start

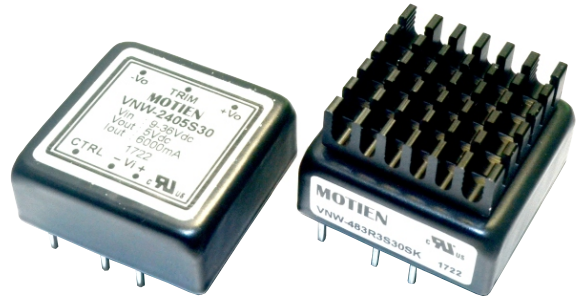

The VNW series is a family of cost effective 30W single & dual output DC-DC converters. These converters combine copper package in a 1"x1" case with high performance features, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5, 12, 15, ± 12 , ± 15 Vdc. High performance features include high efficiency operation up to 92% and output voltage accuracy of $\pm 1\%$ maximum.

ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED.



OUTPUT SPECIFICATIONS		
Output Voltage Accuracy	±1%	
Output Voltage Adjustability(Trim)	Single output: ±10%, max.	
Maximum Output Current	See table	
Line Regulation	±0.5%, max.	
Load Regulation(Io=0% to 100%)	Single: ±0.5%, max. Dual:±1%, max.(balanced load)	
Cross Regulation (Dual Output) (1)	±5%	
Ripple&Noise		
Measured by 20MHz bandwidth		
With a 10uF/25V X7R MLCC	Single output:75mVpk-pk,max.	
With a 10uF/25V X7R MLCC for each output	dual output:60mVpk-pk,max.	
	3.3V output	3.9V
	5V output	6.2V
Over Voltage Protection	12V output	15V
(Zener diode clamp)	15V output	18V
	±12V output	±15V
	±15V output	±18V
Over Current Protection	170% of FL, typ.	
Short Circuit Protection	Indefinite(hiccup) (Automatic Recovery)	
Temperature Coefficient	±0.02%/°C	
Capacitive Load (2)	See table	
Transient Recovery Time (3)	250us, typ.	
Transient Response Deviation(3)	±3%, max.	
	Single Output 3.3V:±5%, max.	
INPUT SPECIFICATIONS		
Input Voltage Range	See table	
Under Voltage Lockout		
24V Models	Module ON / OFF	8.6Vdc / 7.6Vdc, typ.
48V Models	Module ON / OFF	17.5Vdc / 16.5Vdc, typ.
Start up Time	30mS, typ.	
(Nominal Vin and constant resistive load)		
Input Filter	Pi Type	
Input Current(No-Load)	See table, max.	
Input Current(Full-Load)	See table, typ.	
Input Reflected Ripple Current(4)	30mA _{p-p} , typ.	
Remote On/Off (Positive logic)(5)		
ON:	3.0 ... 12Vdc or open circuit	
OFF:	0 ... 1.2Vdc or Short circuit pin2 and pin 3	
OFF idle current:	2 mA, typ.	

GENERAL SPECIFICATIONS		
Efficiency	See table, typ.	
I/O Isolation Voltage(60sec)		
Input/Output	1600Vdc	
Case/Input & Output	1600Vdc	
Isolation Resistance	1000 MΩ, min.	
Isolation Capacitance	2000 pF, max.	
Switching Frequency	3.3 & 05 Vout Models	270kHz, typ.
	other Models	330kHz, typ.
Humidity	95% rel H	
Reliability Calculated MTBF(MIL-HDBK-217 F)	>370 Khrs	
Safety Standard	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1	
Safety Approvals	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1	
ABSOLUTE SPECIFICATIONS (6)		
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.		
Input Surge Voltage(100mS)		
24 Models	50 Vdc, max.	
48 Models	100 Vdc, max.	
Soldering Temperature(1.5mm from case 10sec max.)	260°C max.	
PHYSICAL SPECIFICATIONS		
Case Material	Copper	
Base Material	Non-conductive Black Plastic(UL94V-0 rated)	
Pin Material	Φ1.0mm Brass Solder-coated	
Potting Material	Epoxy (UL94V-0 rated)	
Weight	19.0g	
Dimensions	1.00"x1.00"x0.40"	
ENVIRONMENTAL SPECIFICATIONS		
Operating Ambient Temperature	-40°C ~ +100°C(See Derating Curve) -40°C ~ +55°C(For 100% load)	
Maximum Case Temperature	105°C	
Thermal Impedance	Without Heat-sink	13°C/W, min.
	With Heat-sink	12°C/W, min.
Storage Temperature	-55°C ~ +125°C	
Over Temperature Protection (Case)	115°C, typ.	
Cooling(7)	Nature Convection	
EMC CHARACTERISTICS		
Radiated Emissions	EN55032	CLASS A
Conducted Emissions(8)	EN55032	CLASS A
ESD	IEC61000-4-2	Perf. Criteria A
RS	IEC61000-4-3	Perf. Criteria A
EFT(9)	IEC61000-4-4	Perf. Criteria A
Surge (9)	IEC61000-4-5	Perf. Criteria A
CS	IEC61000-4-6	Perf. Criteria A
PFMF	IEC61000-4-8	Perf. Criteria A

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

VNW - 30W 4:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

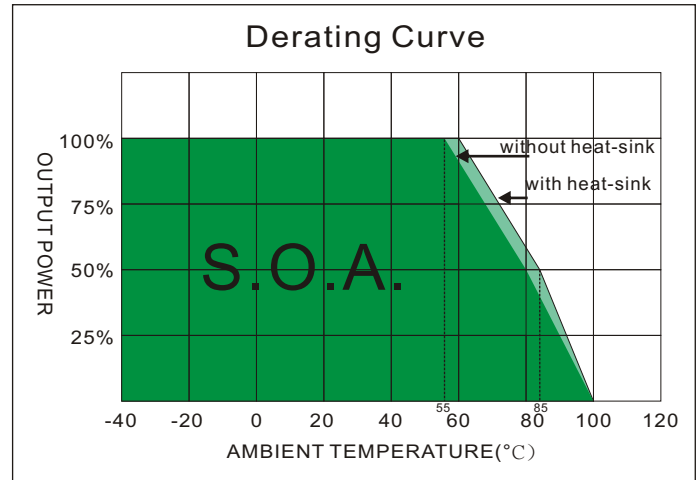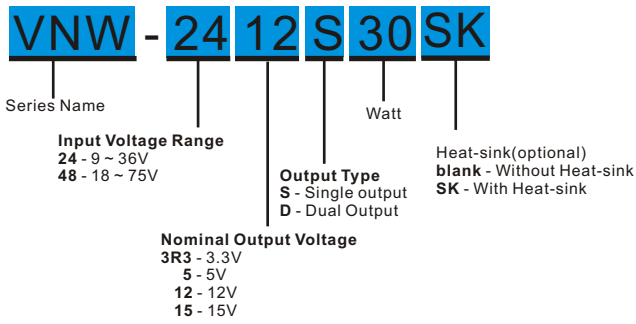

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @FL (μF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VNW-243R3S30	9-36, 24V Nominal	10	1093.75	3.3	0	7000	88	10000
VNW-2405S30	9-36, 24V Nominal	10	1404.49	5	0	6000	89	7200
VNW-2412S30	9-36, 24V Nominal	10	1404.49	12	0	2500	89	1200
VNW-2415S30	9-36, 24V Nominal	10	1373.62	15	0	2000	91	1000
VNW-483R3S30	18-75, 48V Nominal	8	540.73	3.3	0	7000	89	10000
VNW-4805S30	18-75, 48V Nominal	8	694.44	5	0	6000	90	7200
VNW-4812S30	18-75, 48V Nominal	8	694.44	12	0	2500	90	1200
VNW-4815S30	18-75, 48V Nominal	8	679.34	15	0	2000	92	1000
VNW-2412D30	9-36, 24V Nominal	10	1404.49	±12	0	±1250	89	±750
VNW-2415D30	9-36, 24V Nominal	10	1373.62	±15	0	±1000	91	±500
VNW-4812D30	18-75, 48V Nominal	8	694.44	±12	0	±1250	90	±750
VNW-4815D30	18-75, 48V Nominal	8	686.81	±15	0	±1000	91	±500


NOTE

- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Tested by minimal Vin and constant resistive load.
- Tested by normal Vin and 25% load step change (75%-50%-25% of Io).
- Measured Input reflected ripple current with a simulated source inductance of 12uH and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz).
- The remote on/off control pin is referenced to -Vin(pin2).
- Exceeding the absolute ratings of the unit could cause damage.
It is not allowed for continuous operating.
- "Nature Convection" is usually about 30-65 LFM but is not equal to still air (0 LFM).
- Input filter components are used to help meet conducted emissions,
Which application refer to the EMI Filter of design & feature configuration.
- An external filter capacitor is required if the module has to meet IEC61000-4-4,IEC61000-4-5.
The VNW-24XXXX30 recommended an aluminum electrolytic capacitor (Nippon chemi-con KY series, 330uF/100V) and a TVS (SMDJ58A,58V,3000Watt peak pulse power) to connect in parallel.
The VNW-48XXXX30 recommended an aluminum electrolytic capacitor (Nippon chemi-con KY series, 330uF/100V) and a TVS (SMDJ120A,120V,3000Watt peak pulse power) to connect in parallel.

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12uH) and a source capacitor C_{in} (47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

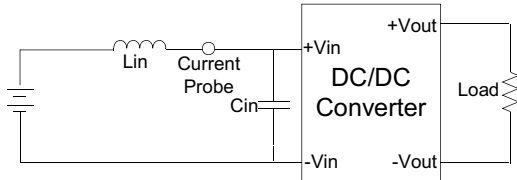

Output Ripple & Noise Measurement Test

To reduce ripple and noise, it is recommended to use a 10uF ceramic disk capacitor to at the output.

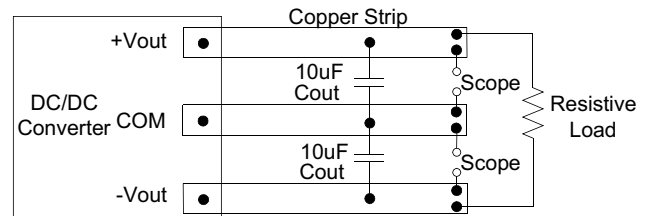

DESIGN & FEATURE CONFIGURATIONS

Over Voltage Protection

The module includes an internal output over voltage protection circuit, which monitors the voltage on the output terminals. If this voltage exceeds the over voltage set point, the module will activate the control loop of internal circuit to clamp the output voltage.


Over Temperature Protection

The over temperature protection consists of circuitry that provides protection from thermal damage. If the temperature exceeds the over temperature threshold the module will shut down.

The module will try to restart after shut down, If the over temperature condition still exists during restart, the module will shut down again. This restart trial will continue until the temperature is within specification.

EMI Filter

Input filter components ($C1, L$) are used to help meet conducted emissions. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

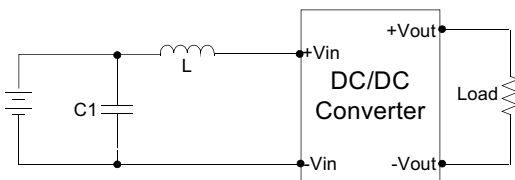

	C1	L
VNW-24XXXXX	1206, 3.3uF/100V	0.82uH
VNW-48XXXXX	1206, 1uF/100V	2.2uH

Over Current Protection

The module includes an internal over current protection circuit, which will endure current limiting for an unlimited duration during output over load condition. If the output current exceeds the OCP set point, the module will shut down automatically (hiccup).


The module will try to restart after shut down. If the over load condition still exists, the module will shut down again.

CTRL Module ON / OFF

Positive logic turns on the module during high logic and off during low logic.


Ctrl module on/off can be controlled by an external switch between the ctrl terminal and -Vin terminal. The switch can be an open collector or open drain.

For positive logic if the ctrl feature is not used, please leave the ctrl pin floating.

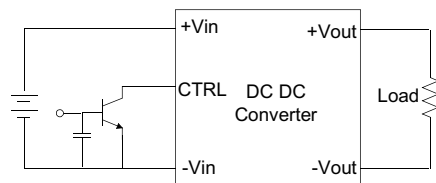


EFT & SURGE Filter

Input components ($C1, D1$) are used to help meet surge test requirement for the module.

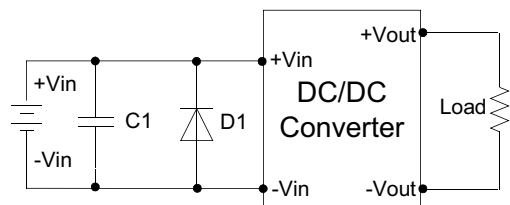

	C1	D1
VNW-24XXXXX	330uF, 100V	TVS, 58V, 3kW
VNW-48XXXXX	330uF, 100V	TVS, 120V, 3kW

MECHANICAL SPECIFICATIONS

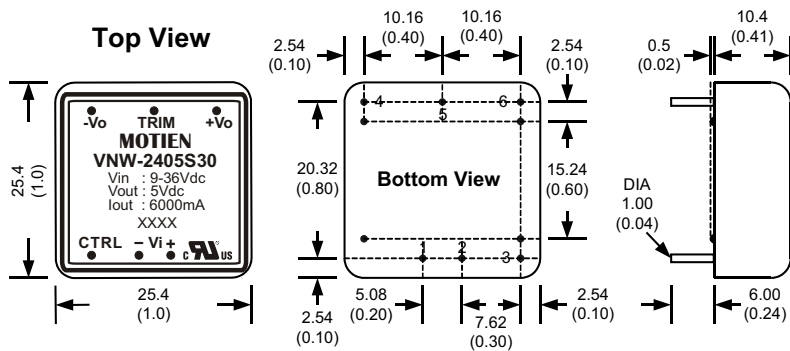


PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL	CTRL
4	+Vout	+Vout
5	Trim	Com
6	-Vout	-Vout

All dimensions are typical in millimeters (inches).

1. Pin diameter: 1.0 ± 0.05 (0.04 ± 0.002)
2. Pin pitch tolerance: ± 0.35 (± 0.014)
3. Case Tolerance: ± 0.5 (± 0.02)
4. Stand-off tolerance: ± 0.1 (± 0.004)


EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method as below. (single output models only)



MECHANICAL SPECIFICATIONS

With Heat-sink

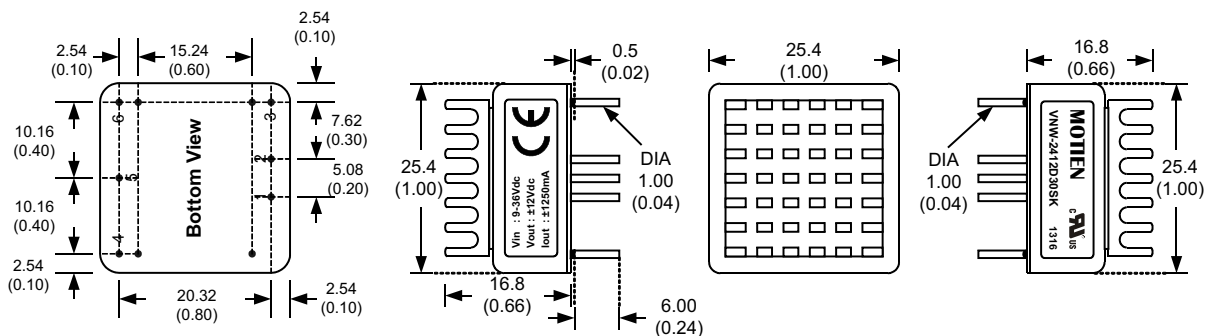

Order code: VNW-XXXXX30SK(contain: heat-sink, thermal pad)

Material: Aluminum

Finish: Anodic treatment (black)

Weight: 2.9 g (0.1oz) (without converter)

Note:

1. Converters will be supplied with heat-sinks already mounted.
Please contact factory for quotation.