

VU-15W Series



15W 2:1 Regulated Single & Dual output

Features

- Wide 2:1 Input Range
- 1600VDC Isolation
- Efficiency up to 91%
- Operating Temperature Range -40 ~ 95°C max.
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Load Protection
- Soft Start
- DIP24 Package
- Remote ON/OFF
- Built-in EMC filter meets EN55032 classA without external components



PART NUMBER STRUCTURE

VU - 24 12 S 15
(1) (2) (3) (4) (5)

(1) Series

(2) Input Voltage Range

12 - 9-18 V
24 - 18-36 V
48 - 36-75 V

(4) Output Type

S - Single Output
D - Dual Output

(5) Watt

(3) Output Voltage

3R3 - 3.3 V
5R1 - 5.1 V
05 - 5.0 V - (Dual Output only)
12 - 12 V
15 - 15 V

ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED

Model Number	Input Voltage Range (VDC)	Input Current		Output Voltage (VDC)	Output Current		Efficiency @FL (% typ.)	Capacitive Load @FL (μF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VU-123R3S15	9-18	15	1279	3.3	0	4000	86	4700
VU-125R1S15	9-18	15	1449	5.1	0	3000	88	3300
VU-1212S15	9-18	15	1404	12	0	1250	89	600
VU-1215S15	9-18	15	1388	15	0	1000	90	400
VU-1205D15	9-18	15	1453	±5	0	±1500	86	±1500
VU-1212D15	9-18	15	1388	±12	0	±625	90	±288
VU-1215D15	9-18	15	1388	±15	0	±500	90	±200
VU-243R3S15	18-36	10	632	3.3	0	4000	87	4700
VU-245R1S15	18-36	10	708	5.1	0	3000	90	3300
VU-2412S15	18-36	10	702	12	0	1250	89	600
VU-2415S15	18-36	10	687	15	0	1000	91	400
VU-2405D15	18-36	10	727	±5	0	±1500	86	±1500
VU-2412D15	18-36	10	694	±12	0	±625	90	±288
VU-2415D15	18-36	10	687	±15	0	±500	91	±200
VU-483R3S15	36-75	5	320	3.3	0	4000	86	4700
VU-485R1S15	36-75	5	358	5.1	0	3000	89	3300
VU-4812S15	36-75	5	351	12	0	1250	89	600
VU-4815S15	36-75	5	351	15	0	1000	89	400
VU-4805D15	36-75	10	368	±5	0	±1500	85	±1500
VU-4812D15	36-75	5	347	±12	0	±625	90	±288
VU-4815D15	36-75	5	347	±15	0	±500	90	±200

INPUT SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	12V Input	9	12	18	VDC
	24V Input	18	24	36	
	48V Input	36	48	75	
Input Filter		Pi Type			
Input Reflected Ripple Current (1)			20		mApk-pk
Start up Time	Nominal Vin and constant resistive load		20		ms
Remote ON/OFF Control (2)	Module ON (Open Circuit)	3.0		12	VDC
	Module OFF (Short circuit pin 1 and pin 2/3)	0		1.2	
		OFF idle current		5.0	
Recommended input fuse (slow blow)	12V Input	3.15			A
	24V Input	1.6			
	48V Input	0.8			
Note : (1) Measured with a simulated source inductance of 12μH and a source capacitor Cin (47μF, ESR<1.0Ω at 100kHz). (2) The remote ON/OFF control pin is referenced to –Vin (pin2 and pin3).					

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			-1.0		+1.0	%
Line Regulation	Single Output		-0.2		+0.2	%
	Dual Output		-0.5		+0.5	
Load Regulation	From 0% to 100% Load	Single Output	-0.5		+0.5	%
		Dual Output	-1.0		+1.0	
Cross Regulation	Asymmetrical Load 25% / 100% for Dual Output		-5		+5	%
Ripple & Noise (1)	20MHz bandwidth				60	mVpk-pk
Over Voltage Protection (Zener diode clamp)	3.3V Output			3.9		VDC
	5V Output			6.2		
	5.1V Output			6.2		
	12V Output			15		
	15V Output			18		
Over Current Protection				150		% of FL
Short Circuit Protection			Indefinite (hiccup) (Automatic Recovery)			
Temperature Coefficient			-0.02		+0.02	%/°C
Maximum Capacitive Load	Minimum Vin and constant resistive load		See Table			
Transient Recovery Time	Nominal Vin and 25% load step change (75%-50%-25% of Io)			250		μs
Transient Response Deviation			-3		+3	%
Note : (1) Measured with a 1.0μF MLCC.						

ABSOLUTE MAXIMUM RATINGS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1000 ms)	12V Input			36	VDC
	24V Input			50	
	48V Input			100	
Soldering Temperature	1.5mm from case 10sec max.			260	°C
Note : These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.					

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, **MOTIEN Technology** accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.







GENERAL SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, and rated for 60sec	1600			VDC
	Case-I/O, and rated for 60sec	1600			
Isolation Resistance	Input-output	1000			MΩ
Isolation Capacitance	Input-output		2000		pF
Switching Frequency	VU-123R3S15 · VU-125R1S15 · VU-243R3S15 · VU-245R1S15		250		kHz
	Other Output		330		
MTBF	MIL-HDBK-217 F @ 25°C	460			k hours
Safety Approval	IEC / EN / UL 62368-1	Designed to meet			
Environmental compliance		RoHS			

ENVIRONMENT SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature	See the Derating Curve	-40		95	°C
Maximum Case Temperature				105	°C
Thermal Impedance		21.0			°C/W
Storage Humidity				95	% rel. H
Storage Temperature		-55		125	°C
Cooling	Natural Convection	30-65 LFM			


EMC SPECIFICATIONS			
Parameter	Standard	Condition	Criterion
Conducted Emissions	EN55032		A
Radiated Emissions	EN55032		A
ESD	IEC 61000-4-2	Air: ± 8kV / Contact: ± 6kV	B
RS	IEC 61000-4-3	10V/m	A
EFT	IEC 61000-4-4	±2kV with external components	B
Surge	IEC 61000-4-5	±1kV with external components	B
CS	IEC 61000-4-6	10Vrms	A
PFMF	IEC 61000-4-8	1A/m	A

PHYSICAL SPECIFICATIONS	
Parameter	Value
Case Material	Aluminum
Base Material	Nonconductive Black Plastic (UL94V-0 rated)
Pin Material	Ø0.5mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	16.0 g, typ.
Dimensions	1.25" x 0.8" x 0.40"

ELECTRICAL CHARACTERISTIC CURVES

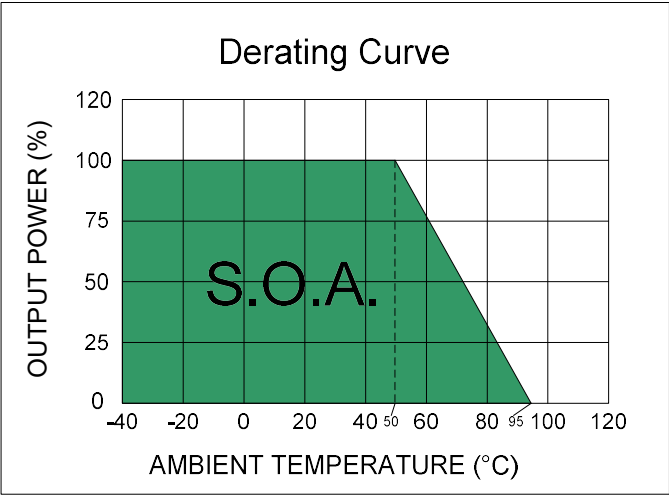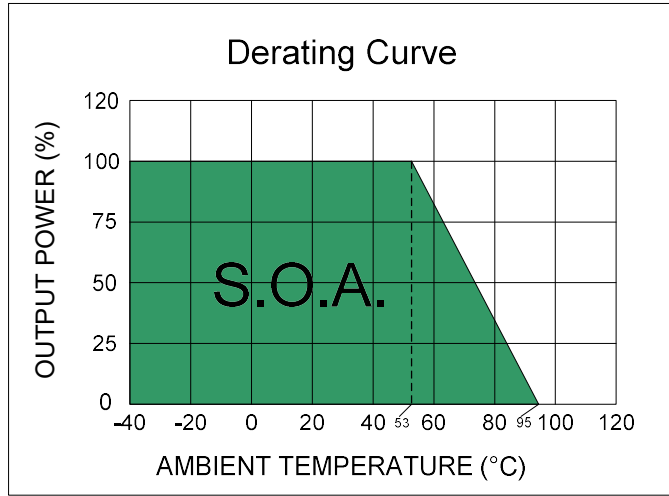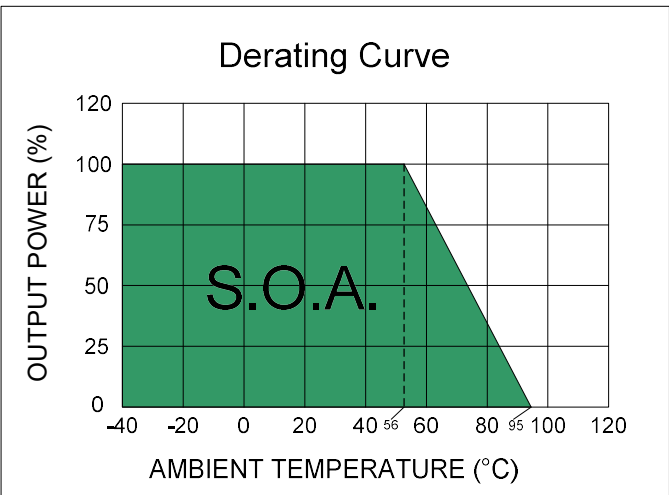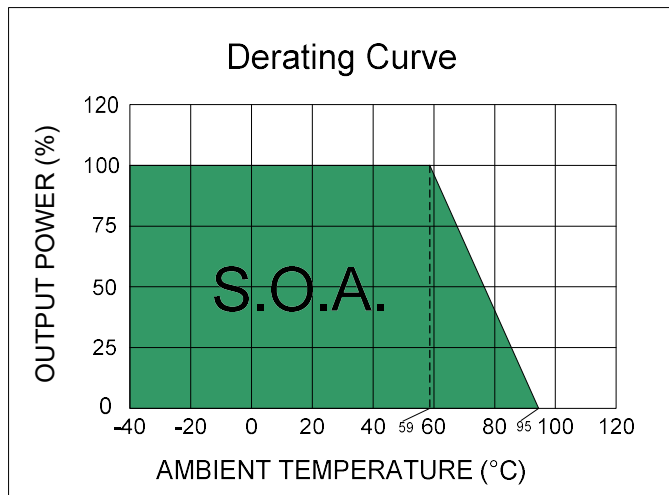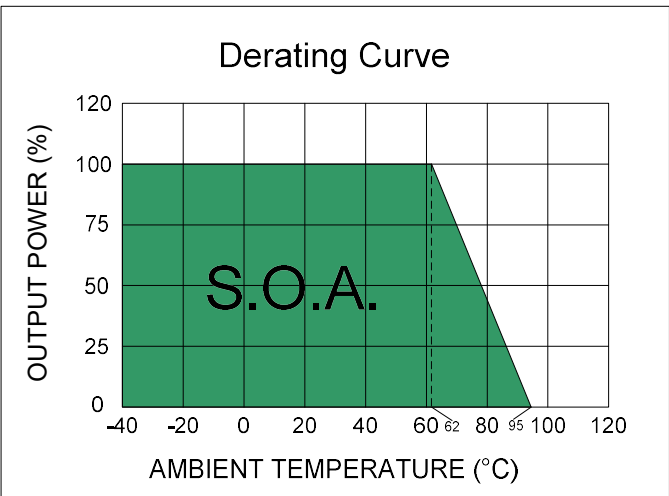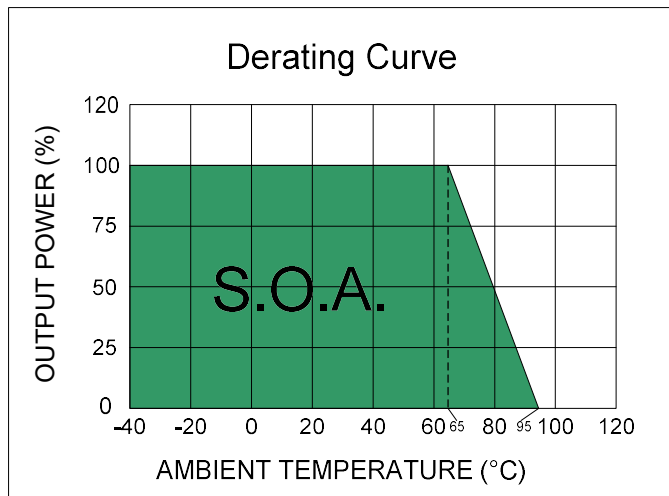Derating Curve 	Derating Curve 
Efficiency 85% Models Derating Curve 	Efficiency 86% Models Derating Curve 
Vout : 3.3V & Efficiency 87% Models Derating Curve 	Efficiency 88% Models Derating Curve 
Efficiency 89% Models	Efficiency 90% Models


The information and specifications contained in this data sheet are believed to be correct at time of publication. However, **MOTIEN Technology** accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

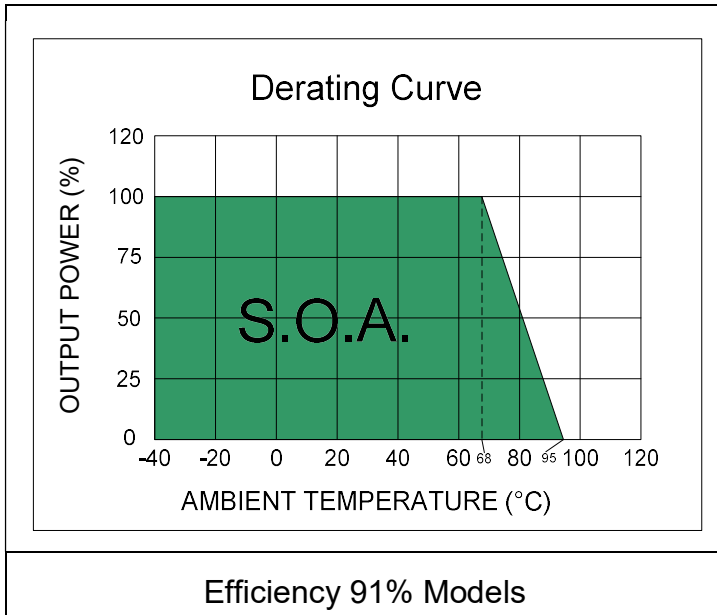

TEST CONFIGURATIONS

Input Reflected Ripple Current Test Step

Input reflected ripple current is measured with a source inductor L_{in} (12 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100kHz) at nominal input and full load.

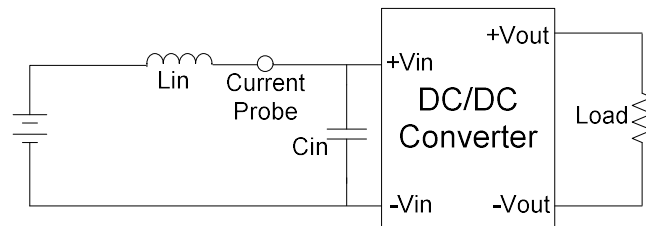

DESIGN & FEATURE CONFIGURATIONS

Over Current Protection

The module includes an internal over current protection circuit, which will endure current limiting for an unlimited duration during output over load condition. If the output current exceeds the OCP set point, the module will shut down automatically (hiccup). The module will try to restart after shut down. If the over load condition still exists, the module will shut down again.

Over Voltage Protection

The module includes an internal output over voltage protection circuit, which monitors the voltage on the output terminals. If this voltage exceeds the over voltage set point, the module will activate the control loop of internal circuit to clamp the output voltage.


Remote Module ON / OFF

Positive logic turns on the module during high logic and off during low logic. Remote module ON/OFF can be controlled by an external switch between the CTRL terminal and -Vin terminal. For positive logic if the remote feature is not used, please leave the CTRL pin floating.

DESIGN & FEATURE CONFIGURATIONS


EMC Filter

The Circuit is used to meet Surge & EFT test.

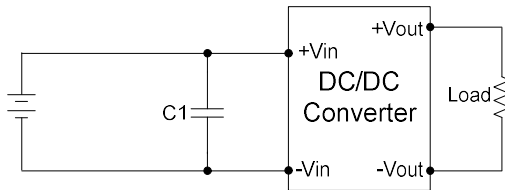


	C1
VU-12XXX15	NIPPON Chemi-con KY series 680μF, 100V
VU-24XXX15	
VU-48XXX15	

or

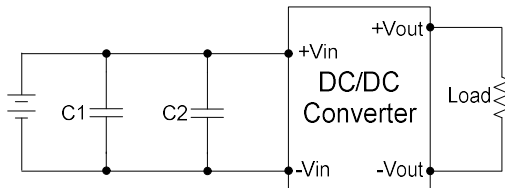

	C1, C2
VU-12XXX15	NIPPON Chemi-con KY series 330μF, 100V
VU-24XXX15	
VU-48XXX15	

MECHANICAL SPECIFICATIONS

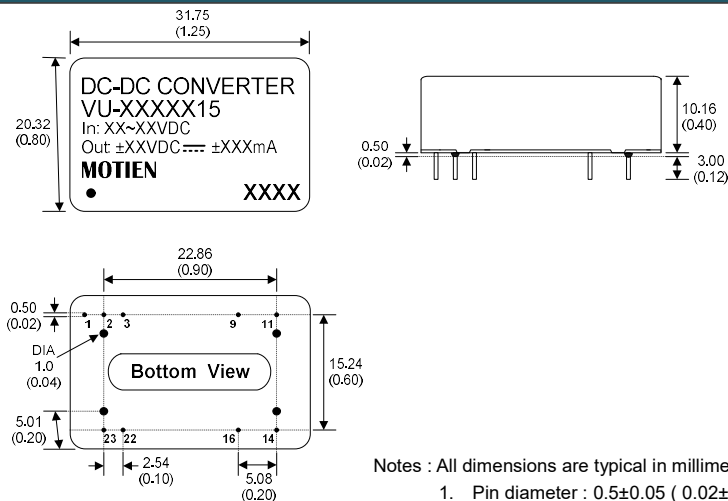

- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter : 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)
 4. Stand-off tolerance: ± 0.1 (± 0.004)


PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
1	CTRL	CTRL
2	-Vin	-Vin
3	-Vin	-Vin
9	N.P.	COM
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	COM
22	+Vin	+Vin
23	+Vin	+Vin

*N.P. : No PIN

*N.C. : No Connection

RECOMMENDED FOOTPRINT DETAILS

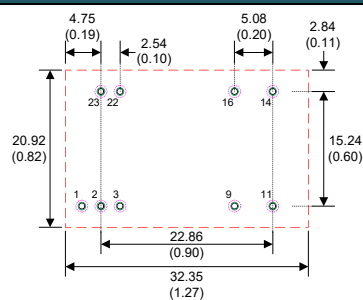

- Notes : 1. All dimensions are typical in millimeters (inches).
- Through hole (black) 1~23: $\varnothing 0.80$ (0.031)
- Top view pad (green) 1~23: $\varnothing 1.00$ (0.039)
- Bottom view pad (pink) 1~23: $\varnothing 1.60$ (0.063)