

VB-2W Series



2W 2:1 Regulated Single & Dual output

Features

- 8 Pin SIL / 16 Pin DIL
- Wide 2:1 Input Range
- Full SMD Technology
- 1000 VDC Isolation, Up to 3000 VDC
- Continuous Short Circuit Protection
- Efficiency up to 77%
- -40°C ~ 85°C Operation Temperature Range
- Plastic Case Standard
- Remote on/off Control (Optional)
- CB & UL Certified Available





The VB series is a family of cost effective 2W single & dual output DC-DC converters. These converters combine non-conductive black plastic case in a 8-pin SIL / 16-pin DIL package with high performance features such as 1000Vdc~3000Vdc input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5,12,24 and 48 with output voltage of 3.3, 5.9, 12, 15, 24, ± 3.3 , ± 5 , ± 9 , ± 12 , ± 15 , ± 24 Vdc. High performance features include high efficiency operation up to 80% and output voltage accuracy of $\pm 2\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		GENERAL SPECIFICATIONS	
Voltage Accuracy	$\pm 2\%$, max.	Efficiency	See table, typ.
Maximum Output Current	See table, max.	I/O Isolation Voltage (60sec)	1000~3000Vdc
Line Regulation	$\pm 0.5\%$, max.	I/O Isolation Capacitance	60 pF, max.
Load Regulation (From 25% to 100% Loading)	$\pm 1\%$, max.	I/O Isolation Resistance	1000M Ohm, min.
Cross Regulation (Dual Output) (4)	$\pm 5\%$	Switching Frequency	100~650kHz
Ripple & Noise (20 Mhz bandwidth)(5)	80mVpp, max.	Humidity	95%relH
Short Circuit Protection	Indefinite (Automatic Recovery)	Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.61 Mhrs
Temperature Coefficient	$\pm 0.02\%/^{\circ}\text{C}$	Safety Standard	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1
Capacitive Load(6)	See table, max.	Safety Approvals	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1
Remote On/Off (CTRL) (11)			
INPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage Range	See table	Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Input Current (No Load)	See table, max.	Pin Material	
Input Current (Full Load)	See table, typ.	SIP Case	Alloy42 Solder-coated
Input Filter	Capacitor	DIP Case	$\Phi 0.5\text{mm}$ Brass Solder-coated
Input Reflected Ripple Current(7)	35mA pk-pk, typ.	Potting Material	Epoxy (UL94V-0 rated)
		Weight	4.5g(SIP)~6g(DIP)
ENVIRONMENT SPECIFICATIONS		Dimensions	
Operating Temperature	-40°C~85°C	SIP Case	0.86"x0.36"x0.44"
Maximum Case Temperature	100°C	DIP Case	0.92"x0.55"x0.40"
Storage Temperature	-40°C~125°C		
Cooling	Nature Convection		
ABSOLUTE MAXIMUM RATINGS(8)		EMC SPECIFICATIONS	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.		Radiated Emissions	EN55032 CLASS A
Input Surge Voltage(100ms max)		Conducted Emissions (12)	EN55032 CLASS A
05 Models	12Vdc,max.	ESD	IEC 61000-4-2 Perf. Criteria A
12 Models	24Vdc,max.	RS	IEC 61000-4-3 Perf. Criteria A
24 Models	40Vdc,max.	EFT (13)	IEC 61000-4-4 Perf. Criteria A
48 Models	80Vdc,max.	Surge (13)	IEC 61000-4-5 Perf. Criteria A
Soldering Temperature (1.5mm from case 10sec max.)	260°C max.	CS	IEC 61000-4-6 Perf. Criteria A
		PFMF	IEC 61000-4-8 Perf. Criteria A

VB - 2W 2:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

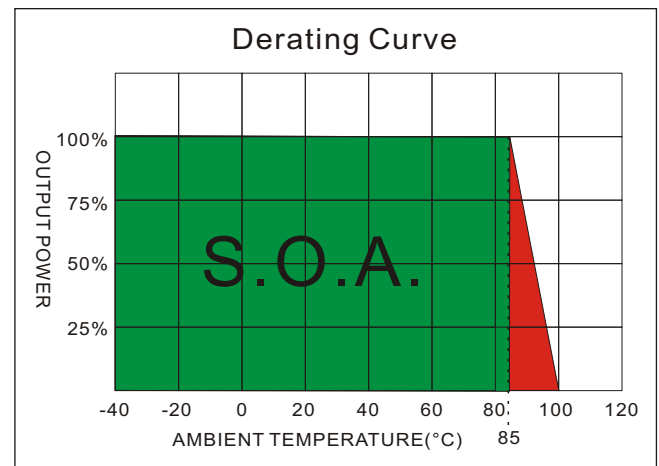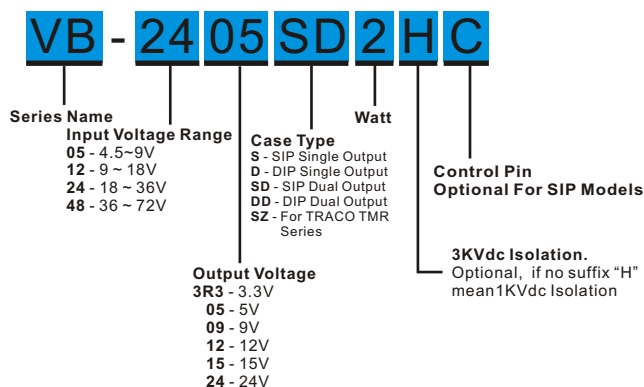

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @FL (μF , max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VB-053R3S2	4.5-9	15	492	3.3	125	500	67	3300
VB-0505S2	4.5-9	15	571	5	100	400	70	3300
VB-0509S2	4.5-9	30	555	9	56	222	72	470
VB-0512S2	4.5-9	30	555	12	42	167	72	470
VB-0515S2	4.5-9	30	547	15	33	133	73	470
VB-0524S2	4.5-9	60	533	24	21	83	75	220
VB-123R3S2	9-18	15	205	3.3	125	500	67	3300
VB-1205S2	9-18	15	216	5	100	400	77	3300
VB-1209S2	9-18	15	213	9	56	222	78	470
VB-1212S2	9-18	15	208	12	42	167	80	470
VB-1215S2	9-18	15	213	15	33	133	78	470
VB-1224S2	9-18	15	208	24	21	83	80	220
VB-243R3S2	18-36	8	98	3.3	125	500	70	3300
VB-2405S2	18-36	8	108	5	100	400	77	3300
VB-2409S2	18-36	8	104	9	56	222	80	470
VB-2412S2	18-36	8	104	12	42	167	80	470
VB-2415S2	18-36	8	104	15	33	133	80	470
VB-2424S2	18-36	8	104	24	21	83	80	220
VB-483R3S2	36-72	6	48	3.3	125	500	71	3300
VB-4805S2	36-72	6	56	5	100	400	74	3300
VB-4809S2	36-72	6	53	9	56	222	78	470
VB-4812S2	36-72	6	53	12	42	167	78	470
VB-4815S2	36-72	6	53	15	33	133	78	470
VB-4824S2	36-72	6	52	24	21	83	80	220
VB-053R3D2	4.5-9	15	492	3.3	125	500	67	3300
VB-0505D2	4.5-9	15	571	5	100	400	70	3300
VB-0509D2	4.5-9	30	555	9	56	222	72	470
VB-0512D2	4.5-9	30	555	12	42	167	72	470
VB-0515D2	4.5-9	30	547	15	33	133	73	470
VB-0524D2	4.5-9	60	533	24	21	83	75	220
VB-123R3D2	9-18	15	205	3.3	125	500	67	3300
VB-1205D2	9-18	15	216	5	100	400	77	3300
VB-1209D2	9-18	15	213	9	56	222	78	470
VB-1212D2	9-18	15	208	12	42	167	80	470
VB-1215D2	9-18	15	213	15	33	133	78	470
VB-1224D2	9-18	15	208	24	21	83	80	220

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : sales@motien.com.tw

VB - 2W 2:1 Regulated Single & Dual output

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (%, typ.)	Capacitor Load @FL (μ F, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VB-243R3D2	18-36	8	98	3.3	125	500	70	3300
VB-2405D2	18-36	8	108	5	100	400	77	3300
VB-2409D2	18-36	8	104	9	56	222	80	470
VB-2412D2	18-36	8	104	12	42	167	80	470
VB-2415D2	18-36	8	104	15	33	133	80	470
VB-2424D2	18-36	8	104	24	21	83	80	220
VB-483R3D2	36-72	6	48	3.3	125	500	71	3300
VB-4805D2	36-72	6	56	5	100	400	74	3300
VB-4809D2	36-72	6	53	9	56	222	78	470
VB-4812D2	36-72	6	53	12	42	167	78	470
VB-4815D2	36-72	6	53	15	33	133	78	470
VB-4824D2	36-72	6	52	24	21	83	80	220
VB-053R3SD2	4.5-9	20	471	± 3.3	± 63	± 250	70	± 1000
VB-0505SD2	4.5-9	20	571	± 5	± 50	± 200	70	± 1000
VB-0509SD2	4.5-9	20	540	± 9	± 28	± 111	74	± 220
VB-0512SD2	4.5-9	25	533	± 12	± 21	± 83	75	± 220
VB-0515SD2	4.5-9	25	533	± 15	± 17	± 67	75	± 220
VB-0524SD2	4.5-9	60	563	± 24	± 10	± 42	71	± 100
VB-123R3SD2	9-18	15	188	± 3.3	± 63	± 250	73	± 1000
VB-1205SD2	9-18	15	222	± 5	± 50	± 200	75	± 1000
VB-1209SD2	9-18	15	210	± 9	± 28	± 111	79	± 220
VB-1212SD2	9-18	15	208	± 12	± 21	± 83	80	± 220
VB-1215SD2	9-18	15	210	± 15	± 17	± 67	79	± 220
VB-1224SD2	9-18	30	219	± 24	± 10	± 42	76	± 100
VB-243R3SD2	18-36	8	94	± 3.3	± 63	± 250	73	± 1000
VB-2405SD2	18-36	8	106	± 5	± 50	± 200	78	± 1000
VB-2409SD2	18-36	8	105	± 9	± 28	± 111	79	± 220
VB-2412SD2	18-36	8	104	± 12	± 21	± 83	80	± 220
VB-2415SD2	18-36	8	104	± 15	± 17	± 67	80	± 220
VB-2424SD2	18-36	20	106	± 24	± 10	± 42	78	± 100
VB-483R3SD2	36-72	6	47	± 3.3	± 63	± 250	73	± 1000
VB-4805SD2	36-72	6	56	± 5	± 50	± 200	74	± 1000
VB-4809SD2	36-72	6	53	± 9	± 28	± 111	79	± 220
VB-4812SD2	36-72	6	53	± 12	± 21	± 83	79	± 220
VB-4815SD2	36-72	6	52	± 15	± 17	± 67	80	± 220
VB-4824SD2	36-72	12	55	± 24	± 10	± 42	75	± 100
VB-053R3DD2	4.5-9	20	471	± 3.3	± 63	± 250	70	± 1000
VB-0505DD2	4.5-9	20	571	± 5	± 50	± 200	70	± 1000
VB-0509DD2	4.5-9	20	540	± 9	± 28	± 111	74	± 220
VB-0512DD2	4.5-9	25	533	± 12	± 21	± 83	75	± 220
VB-0515DD2	4.5-9	25	533	± 15	± 17	± 67	75	± 220
VB-0524DD2	4.5-9	60	563	± 24	± 10	± 42	71	± 100
VB-123R3DD2	9-18	15	188	± 3.3	± 63	± 250	73	± 1000
VB-1205DD2	9-18	15	222	± 5	± 50	± 200	75	± 1000
VB-1209DD2	9-18	15	210	± 9	± 28	± 111	79	± 220
VB-1212DD2	9-18	15	208	± 12	± 21	± 83	80	± 220
VB-1215DD2	9-18	15	210	± 15	± 17	± 67	79	± 220
VB-1224DD2	9-18	30	219	± 24	± 10	± 42	76	± 100
VB-243R3DD2	18-36	8	94	± 3.3	± 63	± 250	73	± 1000
VB-2405DD2	18-36	8	106	± 5	± 50	± 200	78	± 1000

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : sales@motien.com.tw


VB - 2W 2:1 Regulated Single & Dual output

MODEL SELECTION GUIDE


MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% typ.)	Capacitor Load @FL (μF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VB-2409DD2	18-36	8	105	±9	±28	±111	79	±220
VB-2412DD2	18-36	8	104	±12	±21	±83	80	±220
VB-2415DD2	18-36	8	104	±15	±17	±67	80	±220
VB-2424DD2	18-36	20	106	±24	±10	±42	78	±100
VB-483R3DD2	36-72	6	47	±3.3	±63	±250	73	±1000
VB-4805DD2	36-72	6	56	±5	±50	±200	74	±1000
VB-4809DD2	36-72	6	53	±9	±28	±111	79	±220
VB-4812DD2	36-72	6	53	±12	±21	±83	79	±220
VB-4815DD2	36-72	6	52	±15	±17	±67	80	±220
VB-4824DD2	36-72	12	55	±24	±10	±42	75	±100

Suffix "H" means 3KVdc isolation


Suffix "C" means with control pin

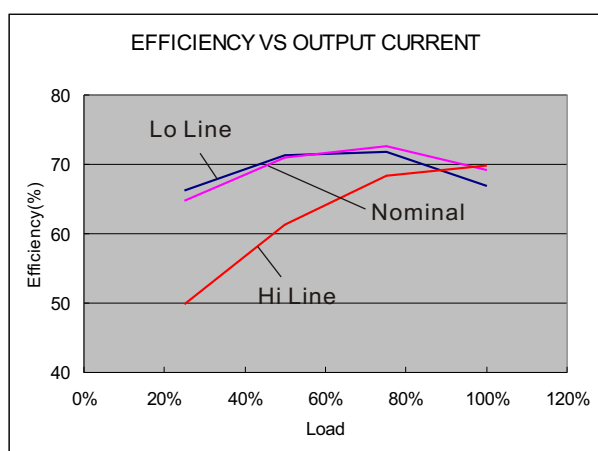


05 Models

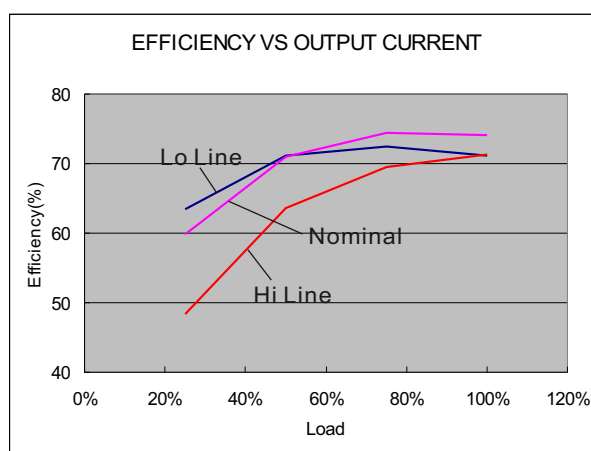

12 Models

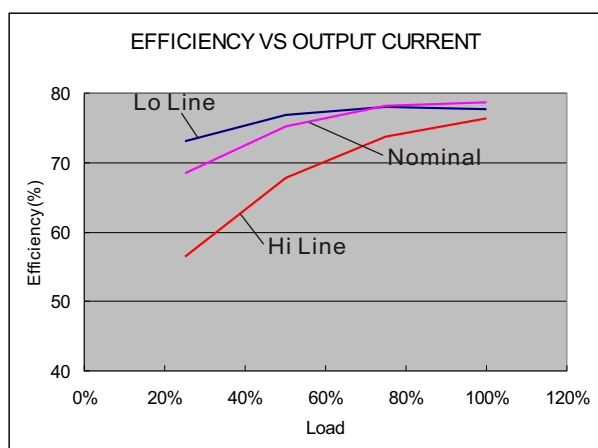

24 Models

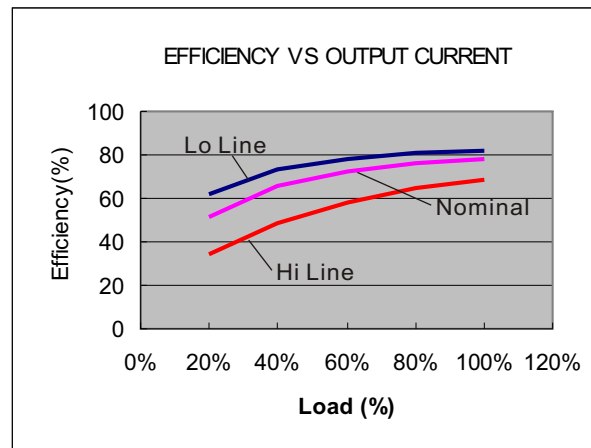

48 Models

NOTE

1. Maximum value at nominal input voltage and full load.
2. Typical value at nominal input voltage and full load.
3. 25% minimum loading is needed.
4. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
5. Ripple/Noise measured with 20MHz bandwidth.
6. Test by nominal input voltage and constant resistor load.
7. Measured Input reflected ripple current with a simulated source inductance of 12μH and a source capacitor Cin(47μF, ESR<1.0Ω at 100KHz).
8. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
9. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
10. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.


The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : sales@motien.com.tw

VB - 2W 2:1 Regulated Single & Dual output

NOTE

11. MCU (Master Control Unit)
The MCU Pin Voltage is referenced to -Vin(Pin 1)
ON:0 ~ 0.8VDC Max.
(Short circuit Pin 1 and Pin 3) or open circuit
OFF:4.5 to 15VDC Max.(or 3.5mA to 15mA Max.)(via R1,D1)
OFF idle current:5mA typ.

Connection example




12. Input filter components are required to help meet conducted emission class A, which application refer to the EMI Filter of design & test configuration.
13. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
The filter capacitor Motien suggest: Nippon - chemi - con KY series, 220 μ F/100V.

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

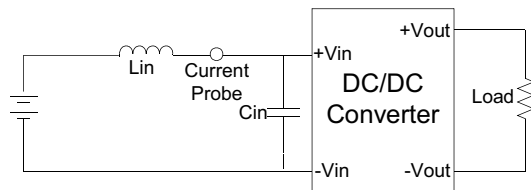


Output Ripple & Noise Measurement Test

The Scope measurement bandwidth is 20MHz.

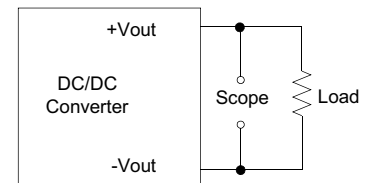



EMI Filter

Input filter components (C_1 , L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

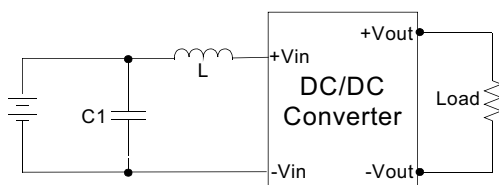

	C1	L
VB-1W&2W-Series	100 μ F/100V	12 μ H

MECHANICAL SPECIFICATIONS





8 Pin SIL Package
Non-Conductive Plastic

Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS			
PIN NUMBER	SINGLE	DUAL/(SD)	DUAL/(SZ)
1	-V Input	-V Input	-V Input
2	+V Input	+V Input	+V Input
3	N.P.	N.C.	N.C.
5	N.P.	N.C.	N.C.
6	+V Output	+V Output	+V Output
7	-V Output	-V Output	Common
8	N.C.	Common	-V Output

PIN NUMBER	SINGLE+C	DUAL/(SD+C)	DUAL/(SZ+C)
1	-V Input	-V Input	-V Input
2	+V Input	+V Input	+V Input
3	Remote On/Off	Remote On/Off	Remote On/Off
5	N.C.	N.C.	N.C.
6	+V Output	+V Output	+V Output
7	-V Output	-V Output	Common
8	N.C.	Common	-V Output

(The Pin Connection of high isolation one is the same with normal one.)

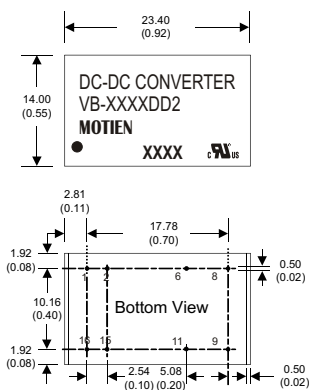

16 Pin DIL Package
Non-Conductive Plastic

Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	-V Input	-V Input
2	-V Input	-V Input
6	N.C.	Common
8	N.C.	-V Output
9	+V Output	+V Output
11	-V Output	Common
15	+V Input	+V Input
16	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)