

# VD-3W Series



3W 2:1 Regulated Single & Dual output

## Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 82%
- -40 ~ 85°C Operation Temperature Range
- Metal Case Standard, Optional Plastic Case
- CB & UL Certified Available For Metal Case Models



The VD series is a family of cost effective 3.0W single & dual output DC-DC converters. These converters are consisted with Nickel-coated copper in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 12,24 and 48 with output voltage of 3.3,5,7,2,9,12,15,18,24, ±3.3, ±5, ±7.2, ±9, ±12, ±15, ±18 and ±24 Vdc. High performance features include high efficiency operation up to 75% and output voltage accuracy of ±1% maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	±1%
Line regulation	±0.5%
Load regulation	±0.5%
	(Output 3.3V / ±3.3V Model) ±1.5%
Ripple & noise (20 MHz bandwidth)(1)	60mV pk-pk
Short circuit protection	Indefinite(Automatic Recovery)
Temperature coefficient	±0.02%/°C
Capacitor load(2)	See table

INPUT SPECIFICATIONS	
Voltage Range	See table
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	PI Type
Input Reflected Ripple Current(3)	35mA pk-pk

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(60sec)	
Input/Output	1500~3500Vdc
Metal Case/Input & Output	1000Vdc
I/O Isolation Capacitance	500 pF, typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	266kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.121 Mhrs
Safety Standard	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1
Safety Approvals	UL/cUL 60950-1 , 62368-1 IEC/EN 60950-1 , 62368-1

PHYSICAL SPECIFICATIONS	
Case Material	Nickel-coated Copper
	Non-conductive Black Plastic(UL94V-0 rated)
Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	Φ0.5mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	17.0g(Metal Case)/13.5g(Plastic Case)
Dimensions	1.25"x0.8"x0.4"

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	-40°C~85°C
Maximum Case Temperature	100°C
Storage Temperature	-40°C~125°C
Cooling	Nature Convection



ABSOLUTE MAXIMUM RATINGS(4)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
12 Models	24 Vdc, max.
24 Models	40 Vdc, max.
48 Models	80 Vdc, max.
Soldering Temperature (1.5mm from case 10sec max.)	260°C, max.

EMC SPECIFICATIONS		
Radiated Emissions	EN55032	CLASS A
Conducted Emissions (5)	EN55032	CLASS A
ESD	IEC 61000-4-2	Perf. Criteria A
RS	IEC 61000-4-3	Perf. Criteria A
EFT (6)	IEC 61000-4-4	Perf. Criteria A
Surge (6)	IEC 61000-4-5	Perf. Criteria A
CS	IEC 61000-4-6	Perf. Criteria A
PFMF	IEC 61000-4-8	Perf. Criteria A

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

## VD - 3W 2:1 Regulated Single & Dual output

### PART NUMBER STRUCTURE

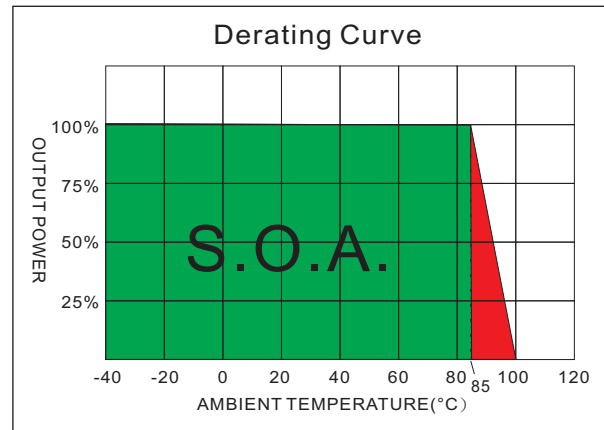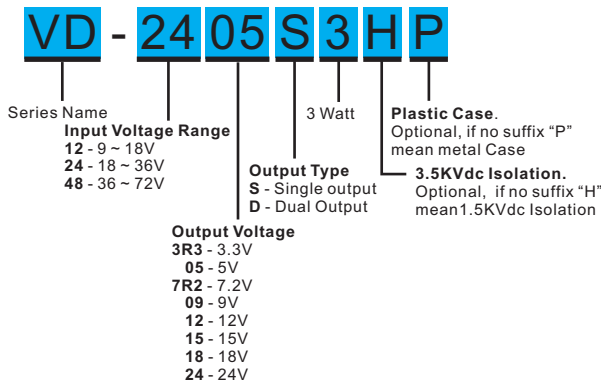

## MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @ FL (µF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VD-123R3S3	9-18	22	343	3.3	0	900	72	470
VD-1205S3	9-18	22	328	5	0	600	76	470
VD-127R2S3	9-18	22	320	7.2	0	416	78	68
VD-1209S3	9-18	22	320	9	0	333	78	68
VD-1212S3	9-18	22	312	12	0	250	80	47
VD-1215S3	9-18	22	312	15	0	200	80	47
VD-1218S3	9-18	22	313	18	0	166	80	22
VD-1224S3	9-18	22	313	24	0	125	80	22
VD-123R3D3	9-18	22	343	±3.3	0	±450	72	±220
VD-1205D3	9-18	22	328	±5	0	±300	76	±220
VD-127R2D3	9-18	22	312	±7.2	0	±208	80	±33
VD-1209D3	9-18	22	312	±9	0	±167	80	±33
VD-1212D3	9-18	22	312	±12	0	±125	80	±22
VD-1215D3	9-18	22	312	±15	0	±100	80	±22
VD-1218D3	9-18	22	313	±18	0	±83	80	±10
VD-1224D3	9-18	22	313	±24	0	±63	80	±10
VD-243R3S3	18-36	12	171	3.3	0	900	72	470
VD-2405S3	18-36	12	164	5	0	600	76	470
VD-247R2S3	18-36	12	160	7.2	0	416	78	68
VD-2409S3	18-36	12	160	9	0	333	78	68
VD-2412S3	18-36	12	156	12	0	250	80	47
VD-2415S3	18-36	12	152	15	0	200	82	47
VD-2418S3	18-36	12	153	18	0	166	82	22
VD-2424S3	18-36	12	153	24	0	125	82	22
VD-243R3D3	18-36	12	171	±3.3	0	±450	72	±220
VD-2405D3	18-36	12	160	±5	0	±300	78	±220
VD-247R2D3	18-36	12	156	±7.2	0	±208	80	±33
VD-2409D3	18-36	12	156	±9	0	±167	80	±33
VD-2412D3	18-36	12	152	±12	0	±125	82	±22
VD-2415D3	18-36	12	152	±15	0	±100	82	±22
VD-2418D3	18-36	12	153	±18	0	±83	82	±10
VD-2424D3	18-36	12	153	±24	0	±63	82	±10

Suffix "H" means 3.5KVdc isolation

Suffix "P" means Plastic case instead of standard Metal Case

## VD - 3W 2:1 Regulated Single & Dual output

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (% , typ.)	Capacitor Load @FL (µF, max.)
		No-Load (mA, max.)	Full Load (mA, typ.)		Min. load (mA)	Full load (mA)		
VD-483R3S3	36-72	8	86	3.3	0	900	72	470
VD-4805S3	36-72	8	82	5	0	600	76	470
VD-487R2S3	36-72	8	80	7.2	0	416	78	68
VD-4809S3	36-72	8	80	9	0	333	78	68
VD-4812S3	36-72	8	78	12	0	250	80	47
VD-4815S3	36-72	8	78	15	0	200	80	47
VD-4818S3	36-72	8	78	18	0	166	80	22
VD-4824S3	36-72	8	78	24	0	125	80	22
VD-483R3D3	36-72	8	86	±3.3	0	±450	72	±220
VD-4805D3	36-72	8	82	±5	0	±300	76	±220
VD-487R2D3	36-72	8	80	±7.2	0	±208	78	±33
VD-4809D3	36-72	8	80	±9	0	±167	78	±33
VD-4812D3	36-72	8	78	±12	0	±125	80	±22
VD-4815D3	36-72	8	78	±15	0	±100	80	±22
VD-4818D3	36-72	8	78	±18	0	±83	80	±10
VD-4824D3	36-72	8	78	±24	0	±63	80	±10

Suffix "H" means 3.5KVdc isolation

Suffix "P" means Plastic case instead of standard Metal Case


### NOTE

1. Ripple/Noise measured with a 1uF ceramic capacitor.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Input filter components are be required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
6. An external filter capacitor is required if the module has to meet IEC 61000-4-4 and IEC 61000-4-5.  
The filter capacitor Motien suggest: Nippon - chemi - con KY series, 220uF/100V.

### TEST CONFIGURATIONS


#### Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor  $L_{in}$ (12uH) and a source capacitor  $C_{in}$ (47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

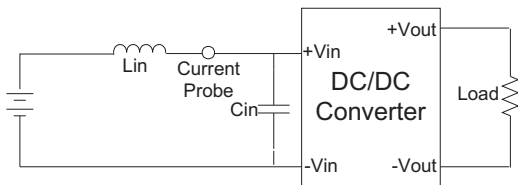


#### Output Ripple & Noise Measurement Test

Use a capacitor  $C_{out}$ (1.0uF) measurement.  
The Scope measurement bandwidth is 0-20MHz.

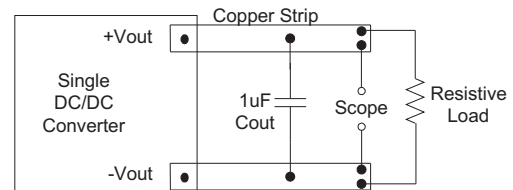


#### EMI Filter

Input filter components ( $C_1$ ,  $L$ ) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

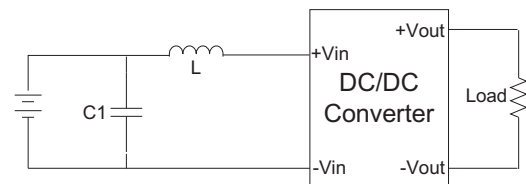


C1	L
100uF, 100V	12uH


**ELECTRICAL CHARACTERISTIC CURVES**

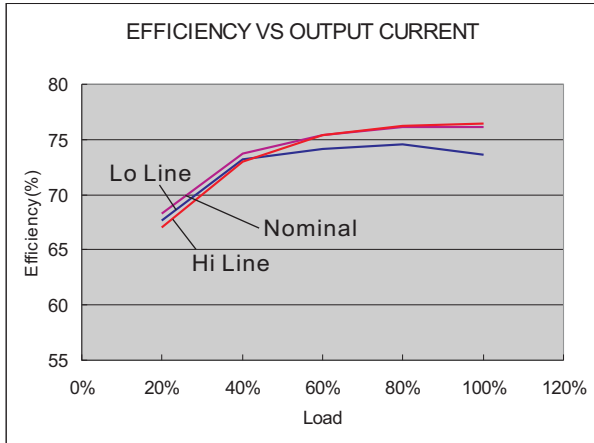

12 Models

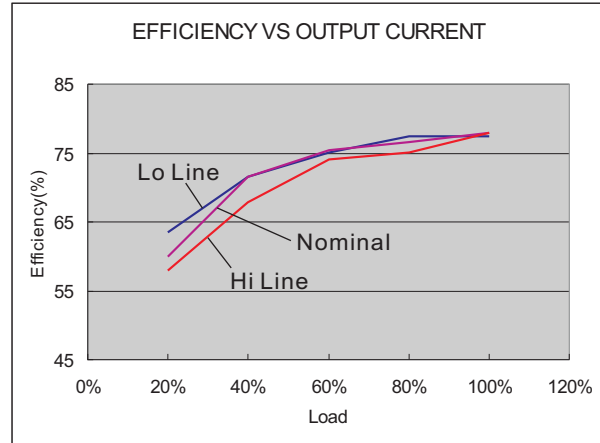


24 Models

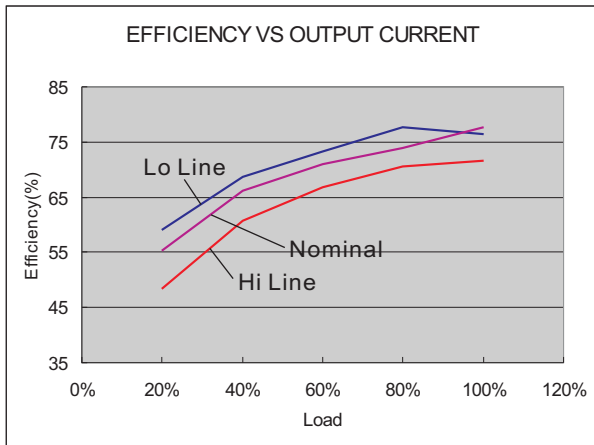

48 Models

**MECHANICAL SPECIFICATIONS**

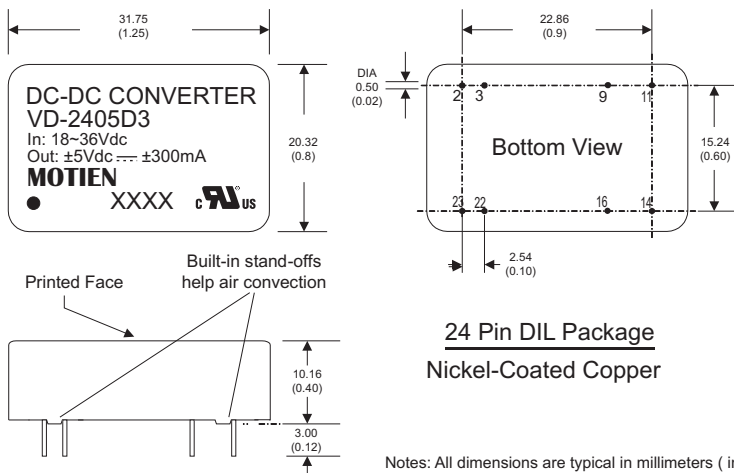



**24 Pin DIL Package**  
Nickel-Coated Copper

- Notes: All dimensions are typical in millimeters ( inches ).
1. Pin diameter:  $0.5 \pm 0.05$  (  $0.02 \pm 0.002$  )
  2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )
  3. Case Tolerance:  $\pm 0.5$  (  $\pm 0.02$  )

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

**MECHANICAL SPECIFICATIONS**

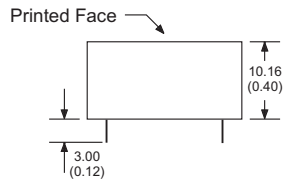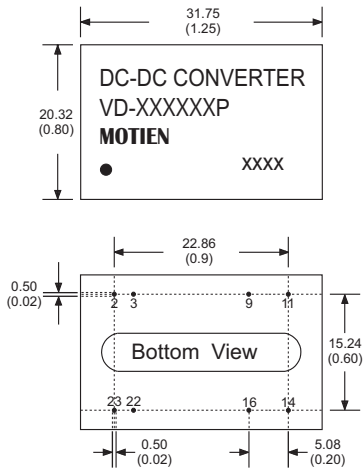

For "P" Case  
24 Pin DIL Package  
 Non-Conductive Plastic

- Notes: All dimensions are typical in millimeters ( inches ).
1. Pin diameter:  $0.5 \pm 0.05$  (  $0.02 \pm 0.002$  )
  2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )
  3. Case Tolerance:  $\pm 0.5$  (  $\pm 0.02$  )

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)