


VNW-40W Series

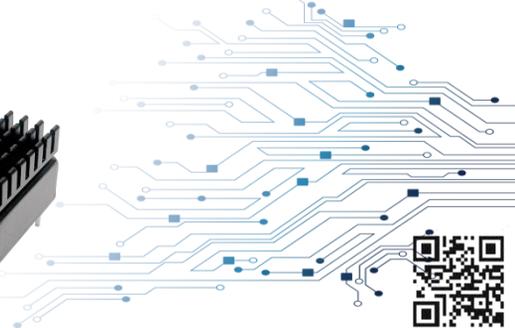

High Power Density 40W DC-DC converter

NEW

VNW-40W Series



4:1

ワイドレンジ
入力



-40~105°C

動作周囲温度



91%

最大効率

SCP
OCP
OVP



過電圧/過負荷/
短絡保護

> VNW-40W シリーズとMOTIEN 既存の40W製品の比較表 :

	VNW-40W Series	VT-40W Series	M40A-40W Series
Package	1" x 1"	2" x 1"	2" x 2"
Dimensions	25.4 x 25.4 x 10.9 mm	50.8 x 25.4 x 10.66 mm	50.8 x 50.8 x 9.9 mm
Pinout compatibility	--	Incompatible	Incompatible
Output Power		40 W	
Efficiency	90 - 91.5 %, typ.	90 - 92.5 %, typ.	89 - 92 %, typ.
Ripple & Noise	150 mVpk-pk, max.	150 mVpk-pk, max.	150 mVpk-pk, max.
Switching frequency	310 - 360 kHz, typ.	270 KHz, typ.	270 KHz, typ.
Short Circuit Protection	Yes	Yes	Yes
Isolation Voltage (input / output)	1600 VDC	1600 VDC	1600 VDC
Maximum Case Temperature	5Vout models : 105°C Other models : 110°C	105°C	110°C
Operating Temperature	-40 to 105°C	-40 to 85°C	-40 to 95°C
Under Voltage Lockout	Yes	Yes	Yes
Remote ON/OFF	Yes	Yes	Yes
Trim	Yes	Yes	Yes
Over Current Protection	Yes	Yes	Yes
Over Voltage Protection	Yes	Yes	Yes
CE Marking	Yes	Yes	Yes
EMI Filter	with external components to meet ClassA	with external components to meet ClassA	with external components to meet ClassA



MOTIEN TECHNOLOGY CO., LTD.

[Http://www.motien.com.tw](http://www.motien.com.tw) [Http://www.motien-power.asia](http://www.motien-power.asia)